Product data sheet





GF Uponor S-Press PLUS tee reduced PPSU 20-16-16

1039949

- Fixed stainless steel sleeve



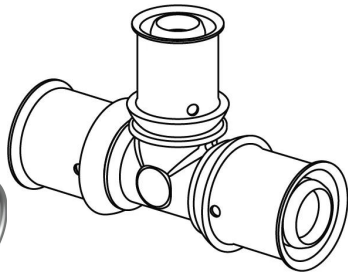

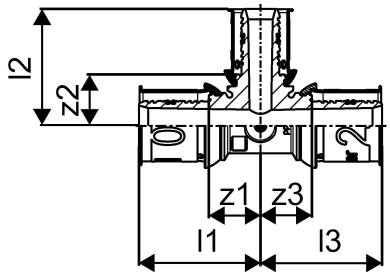

About GF Uponor S-Press PLUS tee reduced PPSU

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval
- WRAS or
- KIWA


to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS tee reduced PPSU 20-16-16

1039949



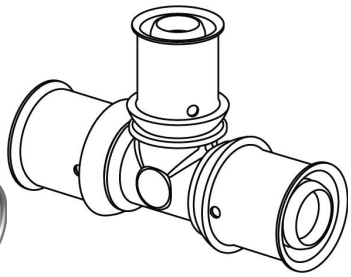

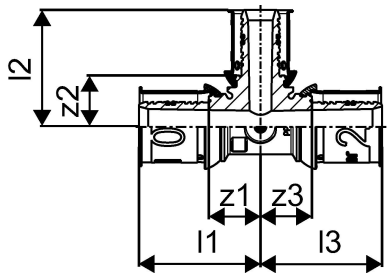

Product code

Item no EAN	6414905228874
Item no GF	35001039949
Item no GTIN	06414905228874
Item no LVI	1720706
Item no NOBB	55171620
Item no NRF	5114403
Item no RSK	1807985
Item no VVS	087443118

Dimensions

Item Unit Height	48.35
Item Unit Length	72.5
Item Unit Weight	0,03204
Item Unit Width	25.7
Item_UOM	pce

Measurements

Length (l1)	37
Length (l2)	35,5
Length (l3)	35,5
z1	15,7
Z2	15,6
Z3	15,6

Packaging

Packaging GTIN PL1	06414905477975
Packaging GTIN PL3	06414905635368
Packaging GTIN PL4	06414905477999

Packaging Height PL1	89
Packaging Height PL3	188
Packaging Height PL4	708
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	0,357
Packaging Weight PL3	3,256
Packaging Weight PL4	181,288
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+