Product data sheet





GF Uponor S-Press PLUS tee reduced PPSU 20-25-20

1039952

- Fixed stainless steel sleeve



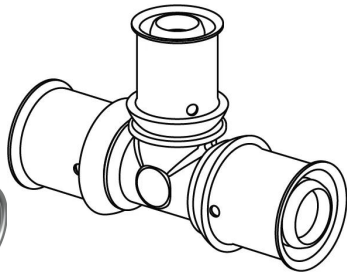

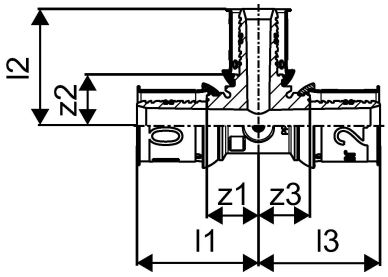

About GF Uponor S-Press PLUS tee reduced PPSU

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval
- WRAS or
- KIWA


to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS tee reduced PPSU 20-25-20

1039952



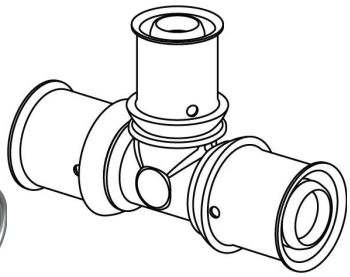

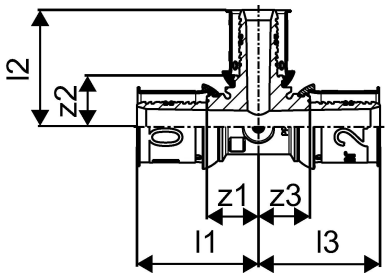

Product code

Item no EAN	6414905228904
Item no GF	35001039952
Item no GTIN	06414905228904
Item no LVI	1720709
Item no NOBB	55171654
Item no NRF	5114406
Item no RSK	1807988
Item no VVS	087440121

Dimensions

Item Unit Height	63.6
Item Unit Length	81
Item Unit Weight	0,05889
Item Unit Width	32.2
Item_UOM	pce

Measurements

Length (l1)	40,5
Length (l2)	47,5
Length (l3)	40,5
z1	19,2
Z2	19,2
Z3	19,2

Packaging

Packaging GTIN PL1	06414905474523
Packaging GTIN PL3	06414905635399
Packaging GTIN PL4	06414905474547

Packaging Height PL1	89
Packaging Height PL3	189
Packaging Height PL4	711
Packaging Length PL1	176
Packaging Length PL3	357
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL3	0,018555075
Packaging Volume PL4	0,68256
Packaging Weight PL1	0,629
Packaging Weight PL3	5,552
Packaging Weight PL4	158,248
Packaging Width PL1	135
Packaging Width PL3	275
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+