


## Uponor S-Press PLUS tee reducer PPSU 25-20-20

1039956

- Fixed stainless steel sleeve

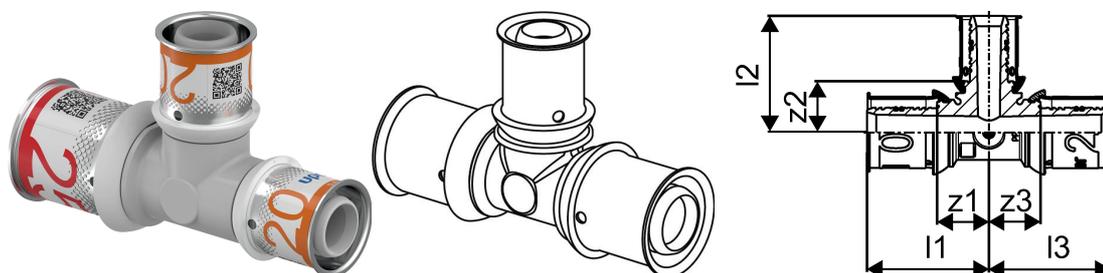

### About Uponor S-Press PLUS tee reducer PPSU

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS tee reducer PPSU 25-20-20

1039956

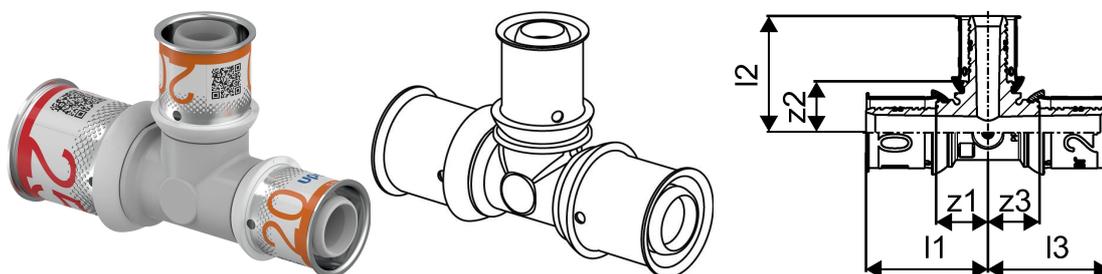

### Product code

Item no EAN	6414905228942
Item no GF	35001039956
Item no GTIN	06414905228942
Item no LVI	1720713
Item no NOBB	55171692
Item no NRF	5114411
Item no RSK	1807992
Item no VVS	087442124

### Dimensions

Item Unit Height	56.6
Item Unit Length	88
Item Unit Weight	0,05824
Item Unit Width	32.2
Item_UOM	pce

### Measurements

Length (I1)	47,5
Length (I2)	40,5
Length (I3)	40,5
z1	19,2
Z2	19,2
Z3	19,2

### Packaging

Packaging GTIN PL1	06414905635269
Packaging GTIN PL3	06414905635436
Packaging GTIN PL4	06414905479931
Packaging Height PL1	89
Packaging Height PL3	189

Packaging Height PL4	711
Packaging Length PL1	176
Packaging Length PL3	357
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL3	0,018555075
Packaging Volume PL4	0,68256
Packaging Weight PL1	0,654
Packaging Weight PL3	5,232
Packaging Weight PL4	150,568
Packaging Width PL1	135
Packaging Width PL3	275
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)