


Uponor Ecoflex Supra PLUS cable set S2

1042311

- Set 2
- Connection of the self regulating frost protection cable
- Frost protection cable tee
- Cable end termination

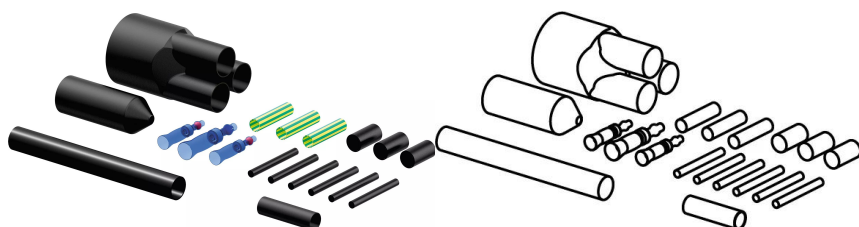

About Uponor Ecoflex Supra PLUS cable set S2

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Polyethylene PE80, PN 12,5 (SDR 11) or PE100, PN 16 (SDR 11) black with blue stripes or PE 100, PN 16 (SDR 11) black with blue layer and new in PE100 RC, PN16 (SDR11) black with blue stripes
- Cable: self-regulating frost protection cable, nominal power output 10W/m at 5°C, electricity feed from one supply point, max.150 m
- Conduit pipe: PE tube to insert a sensor and to measure the temperature
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of cold potable water or pressure drainage in situations where there is a risk of freezing
- For buried installations.
- Operating temperature +20°C
- Static verification for heavy traffic load of 60 tons

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex Supra PLUS cable set S2

1042311

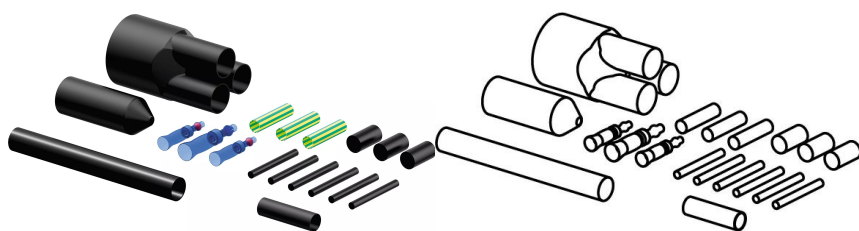

Product code

Item no EAN	6414905450527
Item no GF	35001042311
Item no GTIN	06414905450527
Item no LVI	1846026
Item no NRF	8360946
Item no VVS	070699102

Dimensions

Item Unit Height	44
Item Unit Length	254
Item Unit Weight	0,038
Item Unit Width	44
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900325004
Packaging Height PL1	50
Packaging Length PL1	280
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,0007
Packaging Weight PL1	0,041
Packaging Width PL1	50

Technical documents

Download documents here

UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb