


## Uponor Wipex jointing equal PN6 25x2,3-25x2,3

**1042972**

- Connection of PE-Xa or PE pipe
- 6bar, SDR 11
- DR = dezincification resistance brass

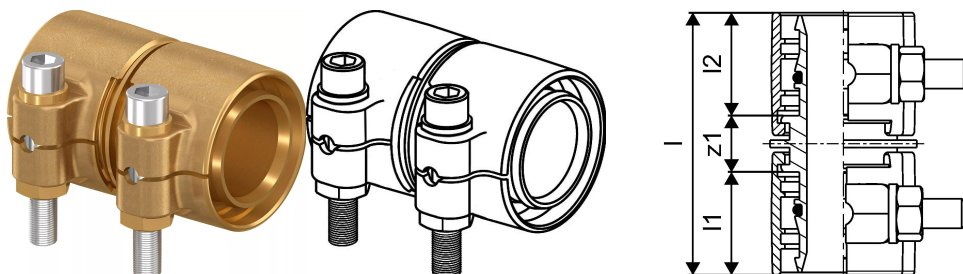

### About Uponor Wipex jointing equal PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.


#### Application

- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

Uponor Wipex jointing equal PN6 25x2,3-25x2,3  
1042972

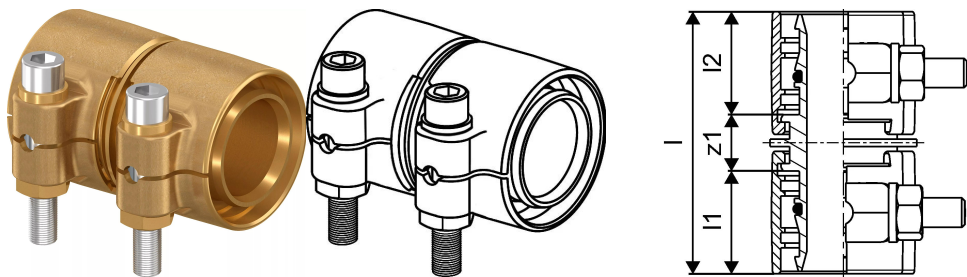

Technical data

Item (unit of measurement)	pce
Item no VVS	087882025
Item no LVI	1932101
Item no NRF	8360791
Length (l)	54 mm
Length (l1)	21 mm
Length (l2)	21 mm
Packaging Quantity PL1	1
Packaging Quantity PL3	30
Packaging Quantity PL4	4200

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)