


## Uponor Wipex jointing equal PN10 40x5,5-40x5,5

**1042979**

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- DR = dezincification resistance brass

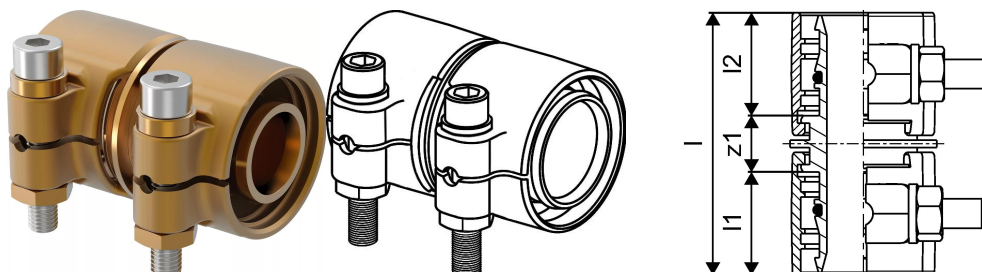

### About Uponor Wipex jointing equal PN10

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Wipex jointing equal PN10 40x5,5-40x5,5

1042979

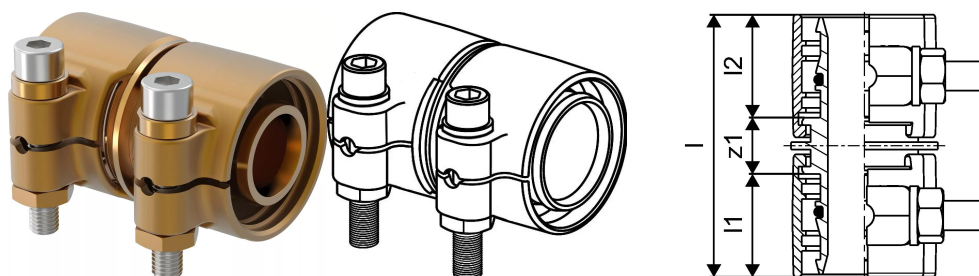

### Technical data

Item no VVS	087882140
Item no NRF	8360783
Item (unit of measurement)	pce
Length (l)	72 mm
Length (l1)	30 mm
Length (l2)	29 mm
Packaging Quantity PL1	1
Packaging Quantity PL3	15
Packaging Quantity PL4	1200

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)