
Product data sheet




GF Uponor S-Press tee PPSU 50-50-50

1046391

- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

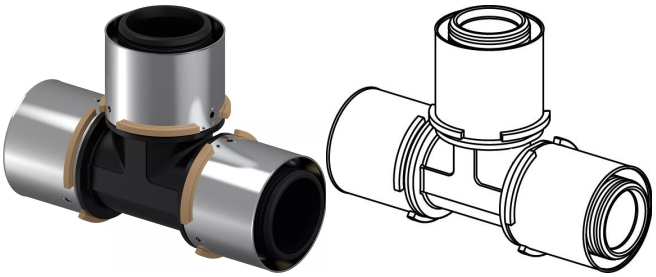

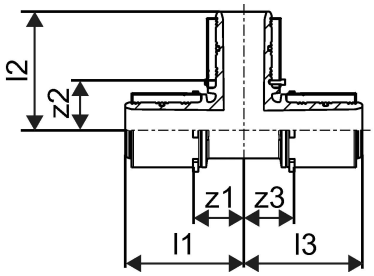

About GF Uponor S-Press tee PPSU

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press tee PPSU 50-50-50

1046391

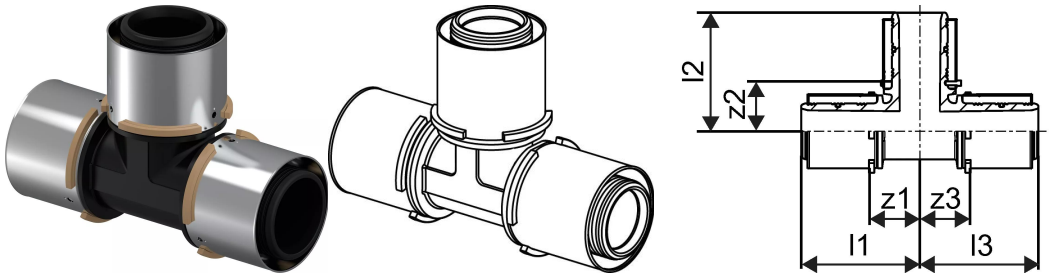

Product code

Item no EAN	4021598112650
Item no GF	35001046391
Item no GTIN	04021598112650
Item no LVI	1722249
Item no NOBB	48516421
Item no NRF	5071987
Item no RSK	1877965
Item no VVS	087440150

Dimensions

Item Unit Height	100
Item Unit Length	145
Item Unit Weight	0,268
Item Unit Width	60
Item_UOM	pce

Measurements

Length (l1)	72,6
Length (l2)	72,5
Length (l3)	72,6
z1	33,2
Z2	33,1
Z3	33,2

Packaging

Packaging GTIN PL1	06414905287680
Packaging GTIN PL4	06414905287697
Packaging Height PL1	95

Packaging Height PL4	570
Packaging Length PL1	280
Packaging Length PL4	1120
Packaging Quantity PL1	3
Packaging Quantity PL4	288
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0049742
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,91
Packaging Weight PL4	87,379
Packaging Width PL1	187
Packaging Width PL4	748

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+