
Product data sheet





GF Uponor S-Press tee reduced PPSU 50-40-50

1046400

- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code





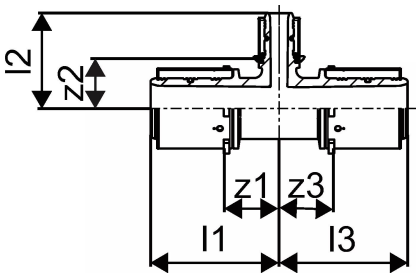

About GF Uponor S-Press tee reduced PPSU

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press tee reduced PPSU 50-40-50

1046400

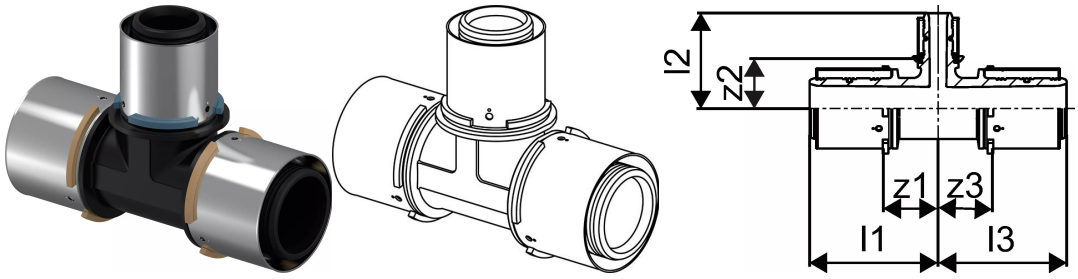

Product code

Item no EAN	4021598112742
Item no GF	35001046400
Item no GTIN	04021598112742
Item no LVI	1722258
Item no NOBB	48519323
Item no NRF	5072015
Item no RSK	1877974
Item no VVS	087442150

Dimensions

Item Unit Height	90
Item Unit Length	143
Item Unit Weight	0,26
Item Unit Width	53
Item_UOM	pce

Measurements

Length (l1)	72,6
Length (l2)	72,5
Length (l3)	72,6
z1	33,3
Z2	33,4
Z3	33,3

Packaging

Packaging GTIN PL1	06414905287666
Packaging GTIN PL4	06414905287673
Packaging Height PL1	95

Packaging Height PL4	580
Packaging Length PL1	280
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	288
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0049742
Packaging Volume PL4	0,5568
Packaging Weight PL1	0,89
Packaging Weight PL4	110,44
Packaging Width PL1	187
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+