


Uponor S-Press composite reducer PPSU 50-40

1046406

- Fast installation with easy bevel and without calibration
- Colour code

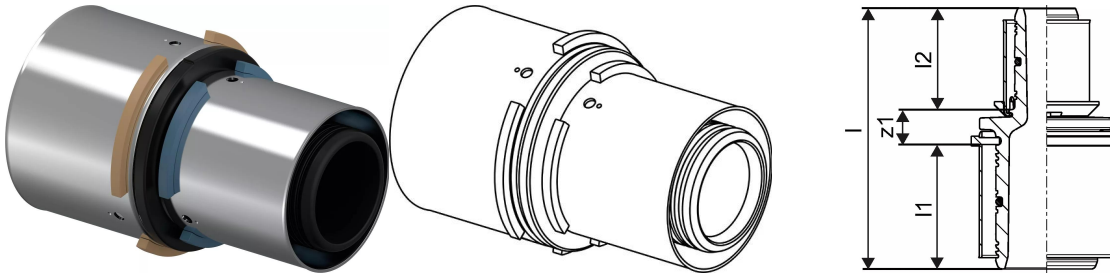

About Uponor S-Press composite reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press composite reducer PPSU 50-40

1046406

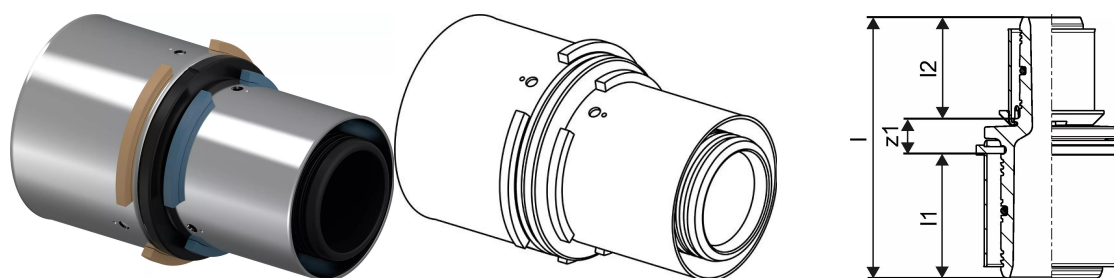

Technical data

Item no VVS	087454150
Item no NRF	5072022
Item (unit of measurement)	pce
Length (l)	91 mm
Length (l1)	39 mm
Length (l2)	39 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	576

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb