


Uponor RS spacer RS2-RS2 l=130mm

1046477

- Made of tin-plated brass
- Spacer to connect RS base parts of equal dimensions or to create T-manifold or a cross-over in distribution lines.

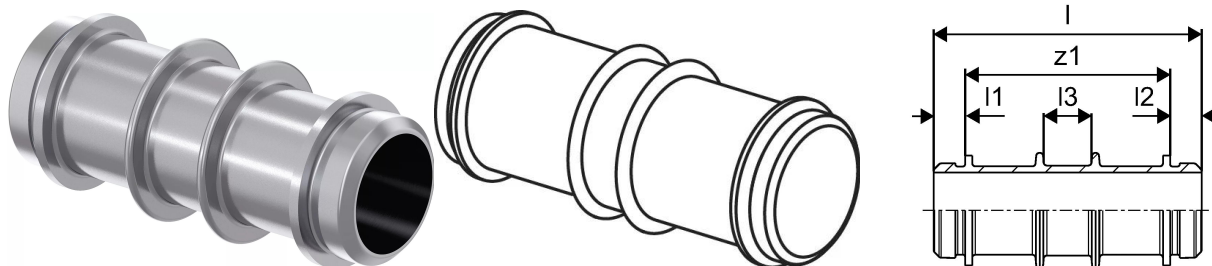

About Uponor RS spacer

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

- UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor RS spacer RS2-RS2 l=130mm

1046477

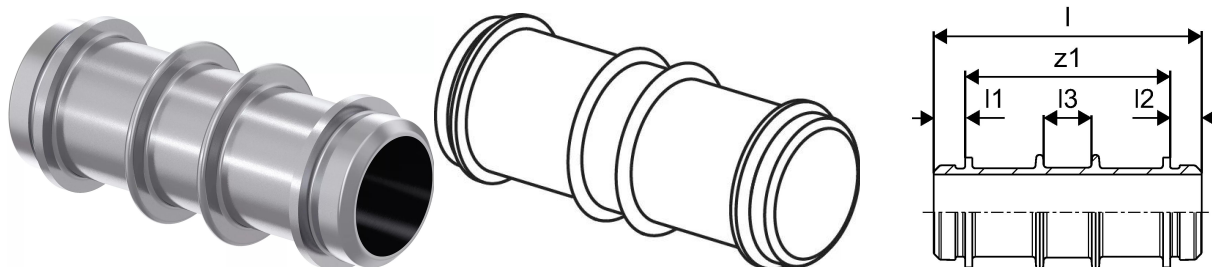

Product code

Item no EAN	4021598111608
Item no GF	35001046477
Item no GTIN	04021598111608
Item no LVI	1720634
Item no NRF	5079083
Item no RSK	1877796
Item no VVS	045458217

Dimensions

Item Unit Height	63
Item Unit Length	167
Item Unit Weight	1,214
Item Unit Width	63
Item_UOM	pce

Measurements

LENGTH_L	170
Length (l1)	20
Length (l2)	20
Length (l3)	30
z1	130

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905482061
Packaging GTIN PL4	06414905482078
Packaging Height PL1	97
Packaging Height PL4	800
Packaging Length PL1	205

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,002087925
Packaging Volume PL4	0,768
Packaging Weight PL1	1,298
Packaging Weight PL4	316,36
Packaging Width PL1	105
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb