


Uponor RS spacer RS3-RS3 l=210mm

1046478

- Made of tin-plated brass
- Spacer to connect RS base parts of equal dimensions e.g to create T-manifold or shift in distribution lines.

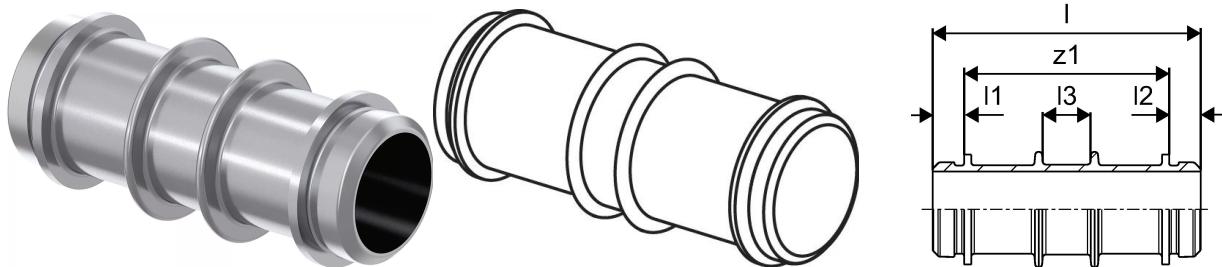

About Uponor RS spacer

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm


-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC

-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor RS spacer RS3-RS3 l=210mm 1046478



Product code

Item no EAN	4021598111615
-------------	---------------

Item no GF	35001046478
------------	-------------

Item no GTIN	04021598111615
--------------	----------------

Item no LVI	1720635
-------------	---------

Item no NRF	5079084
-------------	---------

Item no RSK	1877797
-------------	---------

Item no VVS	045458325
-------------	-----------

Dimensions

Item Unit Height	255
------------------	-----

Item Unit Length	105
------------------	-----

Item Unit Weight	2,717
------------------	-------

Item Unit Width	105
-----------------	-----

Item_UOM	pce
----------	-----

Measurements

LENGTH_L	250
----------	-----

Length (l1)	20
-------------	----

Length (l2)	20
-------------	----

Length (l3)	30
-------------	----

z1	210
----	-----

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905460229
--------------------	----------------

Packaging GTIN PL4	06414905493265
--------------------	----------------

Packaging Height PL1	131
----------------------	-----

Packaging Height PL4	800
----------------------	-----

Packaging Length PL1	285
----------------------	-----

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	96
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,004890885
Packaging Volume PL4	0,768
Packaging Weight PL1	2,87
Packaging Weight PL4	285,832
Packaging Width PL1	131
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb