


Uponor S-Press PLUS lever ball valve 16

1046603

- lever ball valve
- made of brass

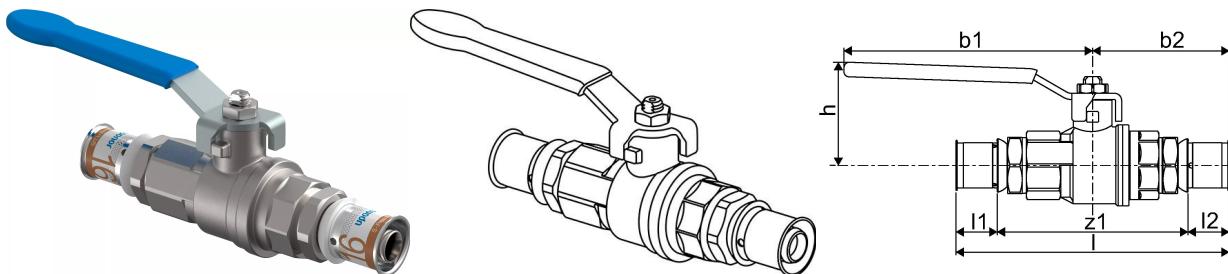

About Uponor S-Press PLUS lever ball valve

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm



- 2101339 : Manifolds and adapters

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS lever ball valve 16

1046603

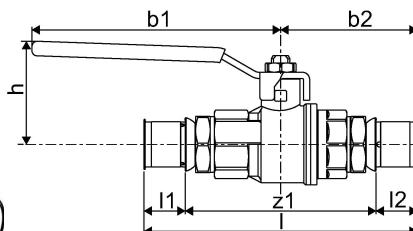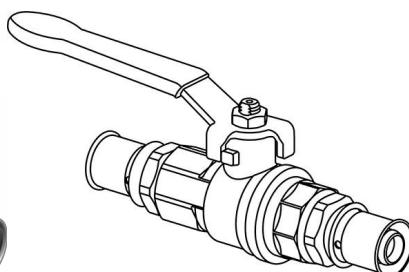

Product code

Item no EAN 6414905430864

Item no GTIN 06414905430864

Item no VVS 045495016

Dimensions

Item Unit Height 58

Item Unit Length 127

Item Unit Weight 0,318

Item Unit Width 33

Item_UOM pce

Measurements

LENGTH_L 121

Length (l1) 19,8

Length (l2) 19,8

Z Measurement b1 100

Z Measurement b2 60,5

Z Measurement h 43

z1 81,4

Technical data

Recycling Text Block PL1 Paper

Recycling Text Block PL2 Paper

Packaging

Packaging GTIN PL1 06414900324823

Packaging GTIN PL3 06414905448616

Packaging Height PL1 120

Packaging Height PL3 162

Packaging Length PL1 240

Packaging Length PL3 233

Packaging Material (number) PL1	20
Packaging Material (number) PL2	22
Packaging Material PL1	Paper
Packaging Material PL2	Paper
Packaging Material (short) PL1	PAP
Packaging Material (short) PL2	PAP
Packaging Quantity PL1	1
Packaging Quantity PL3	6
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,002304
Packaging Volume PL3	0,005963868
Packaging Weight PL1	0,368
Packaging Weight PL3	2,13
Packaging Width PL1	80
Packaging Width PL3	158

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb