


Uponor S-Press PLUS lever ball valve 32

1046606

- Lever ball valve
- Made of brass

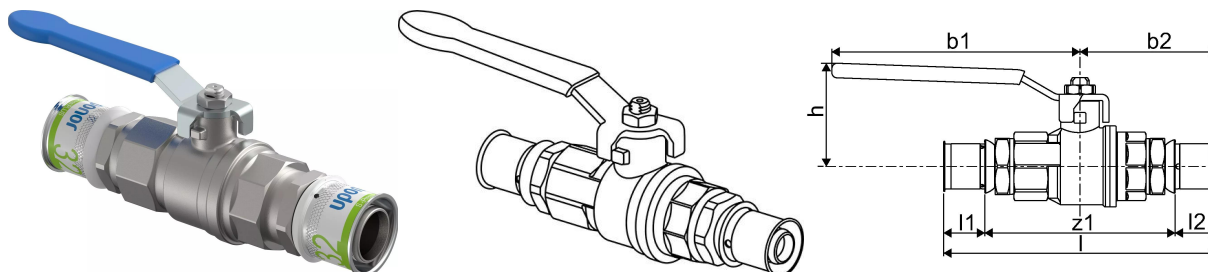

About Uponor S-Press PLUS lever ball valve

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press PLUS lever ball valve 32

1046606

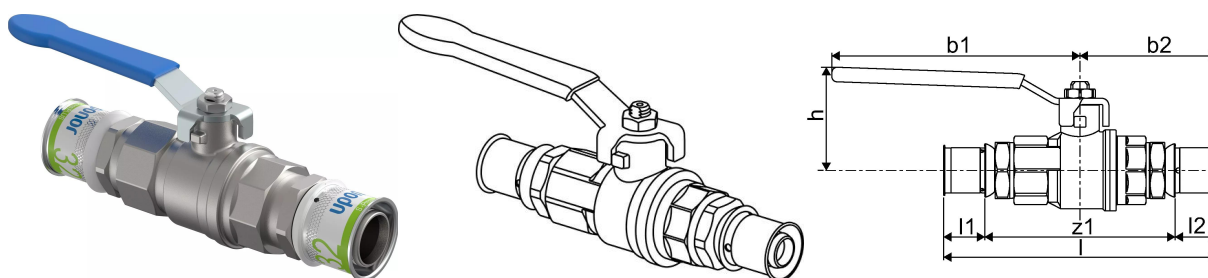

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905430895 |
| Item no GTIN | 06414905430895 |
| Item no VVS | 045495032 |

Dimensions

| | |
|------------------|------|
| Item Unit Height | 75 |
| Item Unit Length | 180 |
| Item Unit Weight | 2,03 |
| Item Unit Width | 52 |
| Item_UOM | pce |

Measurements

| | |
|------------------|-------|
| LENGTH_L | 174 |
| Length (l1) | 28,4 |
| Length (l2) | 28,4 |
| Z Measurement b1 | 120 |
| Z Measurement b2 | 87 |
| Z Measurement h | 57 |
| z1 | 117,2 |

Packaging

| | |
|---------------------------------|----------------|
| Packaging GTIN PL1 | 06414900324816 |
| Packaging GTIN PL3 | 06414905448647 |
| Packaging Height PL1 | 120 |
| Packaging Height PL3 | 162 |
| Packaging Length PL1 | 240 |
| Packaging Length PL3 | 233 |
| Packaging Material (number) PL1 | 20 |
| Packaging Material PL1 | Paper |
| Packaging Material (short) PL1 | PAP |

| | |
|------------------------|-------------|
| Packaging Quantity PL1 | 1 |
| Packaging Quantity PL3 | 6 |
| Packaging Type PL1 | Plastic_Bag |
| Packaging Type PL3 | Box |
| Packaging Volume PL1 | 0,002304 |
| Packaging Volume PL3 | 0,005737392 |
| Packaging Weight PL1 | 2,08 |
| Packaging Weight PL3 | 12,45 |
| Packaging Width PL1 | 80 |
| Packaging Width PL3 | 152 |

Technical data

| | |
|--------------------------|-------|
| Recycling Text Block PL1 | Paper |
|--------------------------|-------|

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb