Product data sheet





GF Uponor S-Press PLUS lever ball valve 32

1046606

- Lever ball valve
- Made of brass



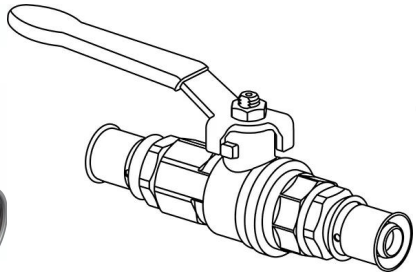

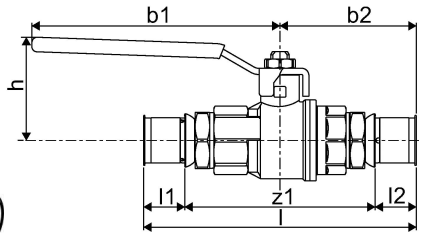

About GF Uponor S-Press PLUS lever ball valve

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS lever ball valve 32

1046606



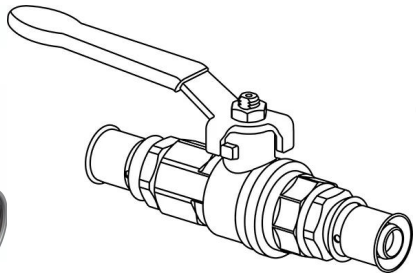

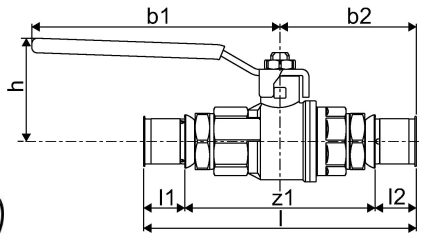

Product code

Item no EAN	6414905430895
Item no GTIN	06414905430895
Item no VVS	045495032

Dimensions

Item Unit Height	75
Item Unit Length	180
Item Unit Weight	2,03
Item Unit Width	52
Item_UOM	pce

Measurements

LENGTH_L	174
Length (l1)	28,4
Length (l2)	28,4
Z Measurement b1	120
Z Measurement b2	87
Z Measurement h	57
z1	117,2

Packaging

Packaging GTIN PL1	06414900324816
Packaging GTIN PL3	06414905448647
Packaging Height PL1	120
Packaging Height PL3	162
Packaging Length PL1	240
Packaging Length PL3	233
Packaging Material (number) PL1	20

Packaging Material PL1	Paper
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	1
Packaging Quantity PL3	6
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,002304
Packaging Volume PL3	0,005737392
Packaging Weight PL1	2,08
Packaging Weight PL3	12,45
Packaging Width PL1	80
Packaging Width PL3	152

Technical data

Recycling Text Block PL1	Paper

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+