


Uponor S-Press lever ball valve S-Press 40

1046607

- lever ball valve

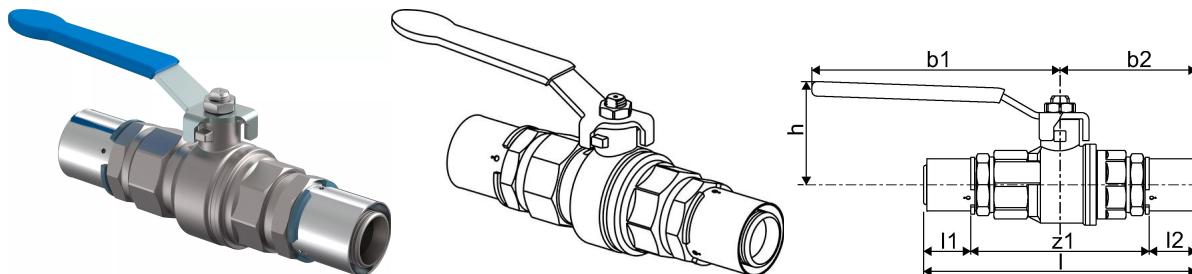

About Uponor S-Press lever ball valve S-Press

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC




- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

Uponor S-Press lever ball valve S-Press 40

1046607

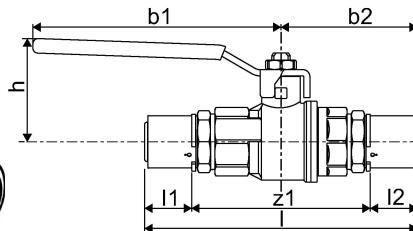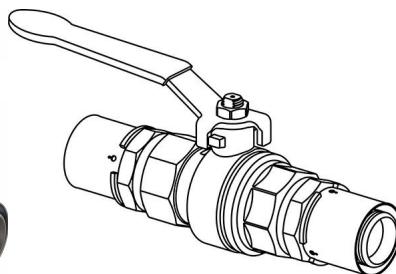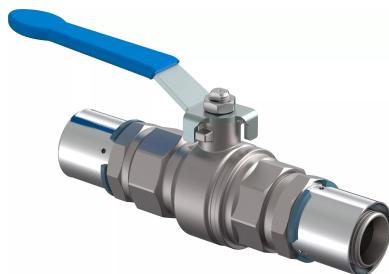

Product code

Item no EAN 6414905430901

Item no GTIN 06414905430901

Item no VVS 045495040

Dimensions

Item Unit Height 100

Item Unit Length 214

Item Unit Weight 3,59

Item Unit Width 62

Item_UOM pce

Measurements

LENGTH_L 213

Length (l1) 37,6

Length (l2) 37,6

Z Measurement b1 158

Z Measurement b2 106,5

Z Measurement h 73

z1 137,8

Technical data

Recycling Text Block PL1 Paper

Packaging

Packaging GTIN PL1 06414900324786

Packaging GTIN PL3 06414900299428

Packaging Height PL1 120

Packaging Height PL3 162

Packaging Length PL1 240

Packaging Length PL3 355

Packaging Material (number) PL1 20

Packaging Material PL1	Paper
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	1
Packaging Quantity PL3	4
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,002304
Packaging Volume PL3	0,01351485
Packaging Weight PL1	3,64
Packaging Weight PL3	6,747
Packaging Width PL1	80
Packaging Width PL3	235

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb