


Uponor S-Press lever ball valve S-Press 40

1046607

- Made of tin plated brass
- Lever ball valve
- Colour code
- Inspection windows on press sleeve

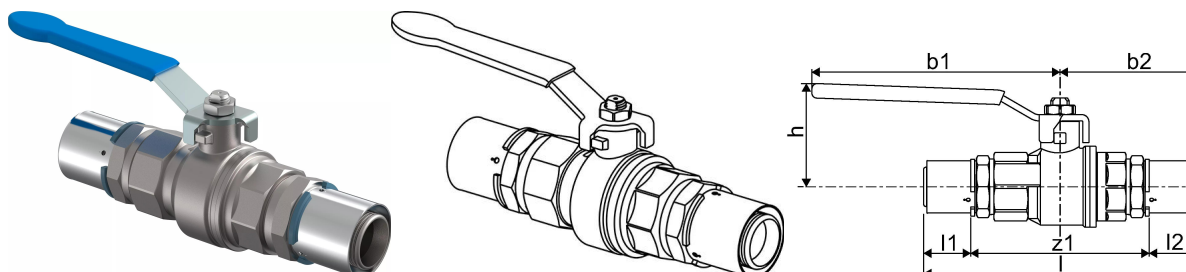

About Uponor S-Press lever ball valve S-Press

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press lever ball valve S-Press 40

1046607

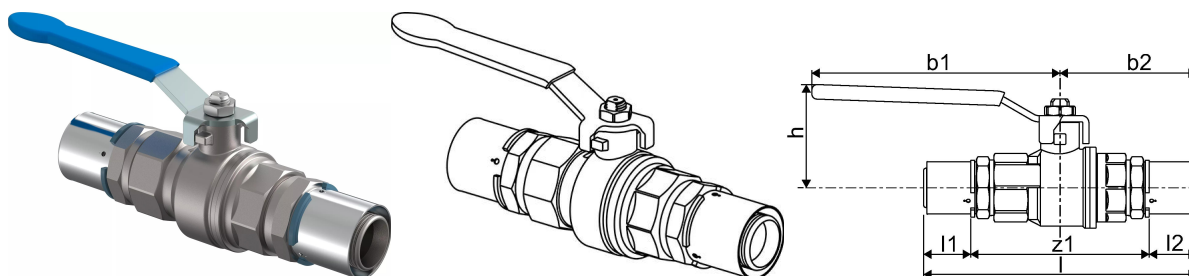

Product code

Item no EAN	6414905430901
Item no GTIN	06414905430901
Item no VVS	045495040

Dimensions

Item Unit Height	100
Item Unit Length	214
Item Unit Weight	3,59
Item Unit Width	62
Item_UOM	pce

Measurements

LENGTH_L	213
Length (l1)	37,6
Length (l2)	37,6
Z Measurement b1	158
Z Measurement b2	106,5
Z Measurement h	73
z1	137,8

Packaging

Packaging GTIN PL1	06414900324786
Packaging GTIN PL3	06414900299428
Packaging Height PL1	120
Packaging Height PL3	162
Packaging Length PL1	240
Packaging Length PL3	355
Packaging Material (number) PL1	20
Packaging Material PL1	Paper
Packaging Material (short) PL1	PAP

Packaging Quantity PL1	1
Packaging Quantity PL3	4
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,002304
Packaging Volume PL3	0,01351485
Packaging Weight PL1	3,64
Packaging Weight PL3	6,747
Packaging Width PL1	80
Packaging Width PL3	235

Technical data

Recycling Text Block PL1	Paper
--------------------------	-------

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb