

## Uponor S-Press lever ball valve S-Press 50

### 1046608

- lever ball valve



## About Uponor S-Press lever ball valve S-Press

### Specification

- with fixed press sleeve
- stop ring
- test safety

### Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

## Uponor S-Press lever ball valve S-Press 50

1046608

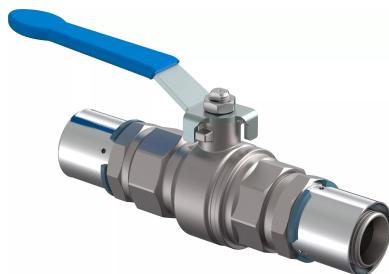

### Product code

Item no EAN 6414905430918

Item no GTIN 06414905430918

Item no VVS 045495050

### Dimensions

Item Unit Height 115

Item Unit Length 225

Item Unit Weight 4,59

Item Unit Width 72

Item\_UOM pce

### Measurements

LENGTH\_L 226

Length (l1) 37,6

Length (l2) 37,6

Z Measurement b1 158

Z Measurement b2 113

Z Measurement h 79

z1 150,8

### Technical data

Recycling Text Block PL1 Paper

### Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

### Packaging

Packaging GTIN PL1 06414900324779

Packaging GTIN PL3 06414905448661

Packaging Height PL1 120

Packaging Height PL3 155

Packaging Length PL1 240

Packaging Length PL3	355
Packaging Material (number) PL1	20
Packaging Material PL1	Paper
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	1
Packaging Quantity PL3	4
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,002304
Packaging Volume PL3	0,012930875
Packaging Weight PL1	4,64
Packaging Weight PL3	19,27
Packaging Width PL1	80
Packaging Width PL3	235

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)