
Product data sheet



GF Uponor S-Press lever ball valve S-Press 50

1046608

- Made of tin plated brass
- Lever ball valve
- Colour code
- Inspection windows on press sleeve

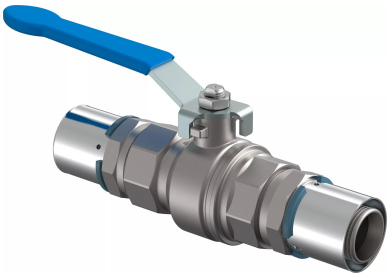

About GF Uponor S-Press lever ball valve S-Press

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press lever ball valve S-Press 50

1046608

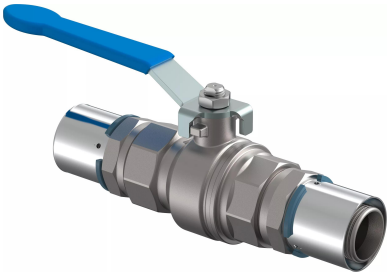

Status

Item Available Till date	2027-04-30T00:00:00.000+0200
MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Product code

Item no EAN	6414905430918
Item no GTIN	06414905430918
Item no VVS	045495050
Item Replacement 1	1240125

Dimensions

Item Unit Height	115
Item Unit Length	225
Item Unit Weight	4,59
Item Unit Width	72
Item_UOM	pce

Measurements

LENGTH_L	226
Length (l1)	37,6
Length (l2)	37,6
Z Measurement b1	158
Z Measurement b2	113
Z Measurement h	79
z1	150,8

Packaging

Packaging GTIN PL1	06414900324779
Packaging GTIN PL3	06414905448661
Packaging Height PL1	120

Packaging Height PL3	155
Packaging Length PL1	240
Packaging Length PL3	355
Packaging Material (number) PL1	20
Packaging Material PL1	Paper
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	1
Packaging Quantity PL3	4
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,002304
Packaging Volume PL3	0,012930875
Packaging Weight PL1	4,64
Packaging Weight PL3	19,27
Packaging Width PL1	80
Packaging Width PL3	235

Technical data

Recycling Text Block PL1	Paper

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+