


Uponor RS spacer RS3-RS3 l=5mm

1046751

- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.

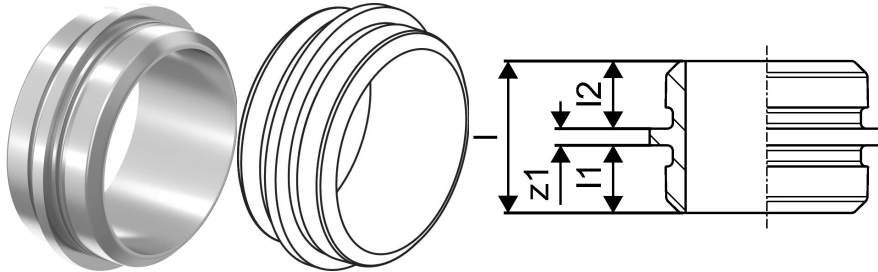

About Uponor RS spacer

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS spacer RS3-RS3 l=5mm

1046751

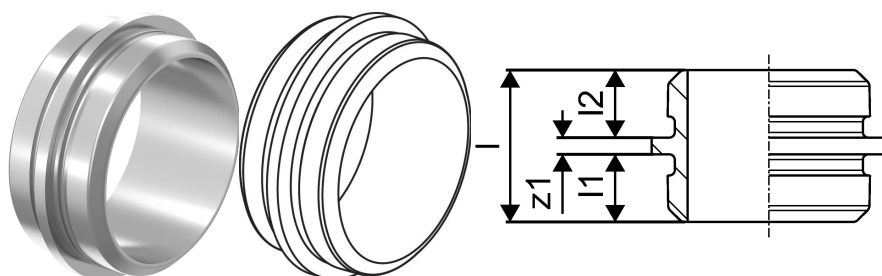

Technical data

Item no VVS	045458305
Item no NRF	5079086
Item (unit of measurement)	pce
Length (l)	45 mm
Length (l1)	20 mm
Length (l2)	20 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	240

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb