


## Uponor S-Press adapter male thread 40-R1 1/4"MT

### 1046901

- Made of tin-plated brass
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

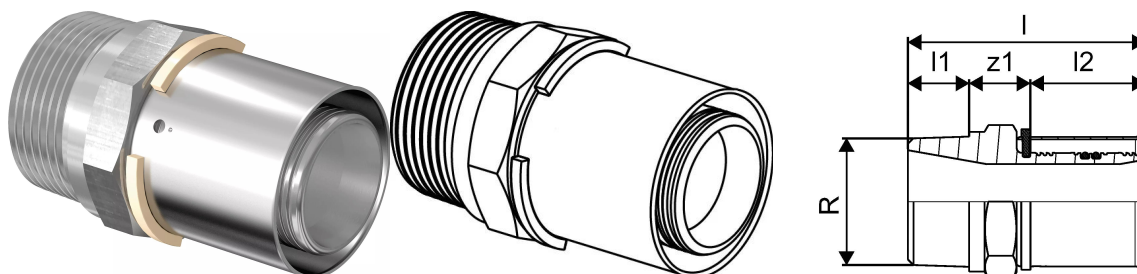

### About Uponor S-Press adapter male thread

#### Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press adapter male thread 40-R1 1/4"MT

1046901

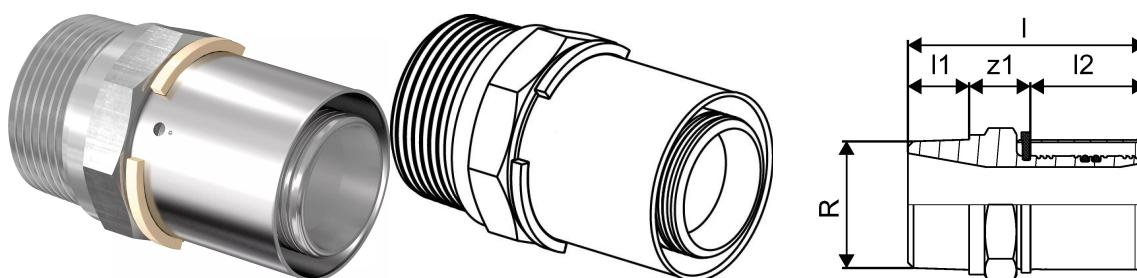

### Product code

Item no EAN	4021598113985
Item no GF	35001046901
Item no GTIN	04021598113985
Item no VVS	045481420

### Dimensions

Item Unit Height	75
Item Unit Length	55
Item Unit Weight	0,381
Item Unit Width	55
Item_UOM	pce

### Measurements

LENGTH_L	77,5
Length (l1)	20
Length (l2)	37,5
Male_thread_R	1 1/4
z1	20

### Packaging

Packaging GTIN PL1	06414905401413
Packaging GTIN PL4	06414905401420
Packaging Height PL1	89
Packaging Height PL4	560
Packaging Length PL1	176
Packaging Length PL4	1120
Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,4691456
Packaging Weight PL1	1,944
Packaging Weight PL4	378,816
Packaging Width PL1	135
Packaging Width PL4	748

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)