
Product data sheet




GF Uponor S-Press adapter female thread FT 40-Rp1 1/2"

1046904

- Made of tin-plated brass
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

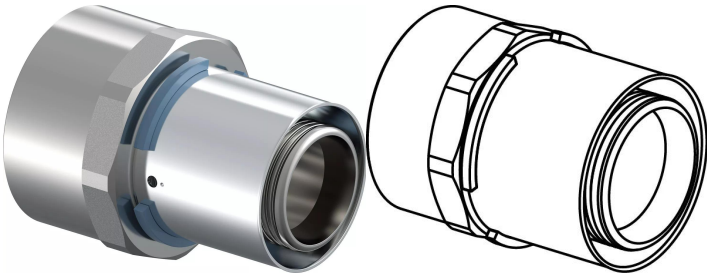



About GF Uponor S-Press adapter female thread FT

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press adapter female thread FT 40-Rp1 1/2"

1046904

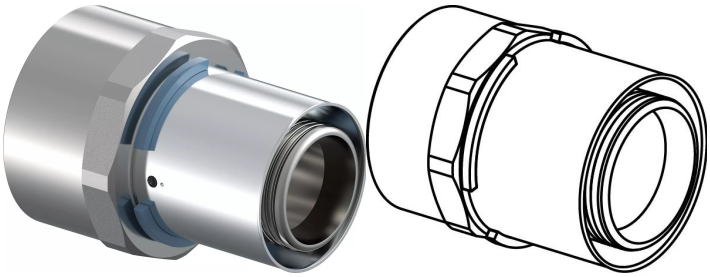



Measurements

Female thread Rp	1 1/2
LENGTH_L	75,5
Length (l1)	21,4
Length (l2)	37,5
z1	16,6

Product code

Item no EAN	4021598114012
Item no GF	35001046904
Item no GTIN	04021598114012
Item no NOBB	48505312
Item no NRF	5071552
Item no VVS	045482042

Dimensions

Item Unit Height	55
Item Unit Length	75.5
Item Unit Weight	0,354
Item Unit Width	55
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905481101
Packaging GTIN PL4	06414905481118
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200

Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	2,039
Packaging Weight PL4	412,84
Packaging Width PL1	135
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+