


Uponor S-Press adapter female thread 40-Rp1 1/2"FT

1046904

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

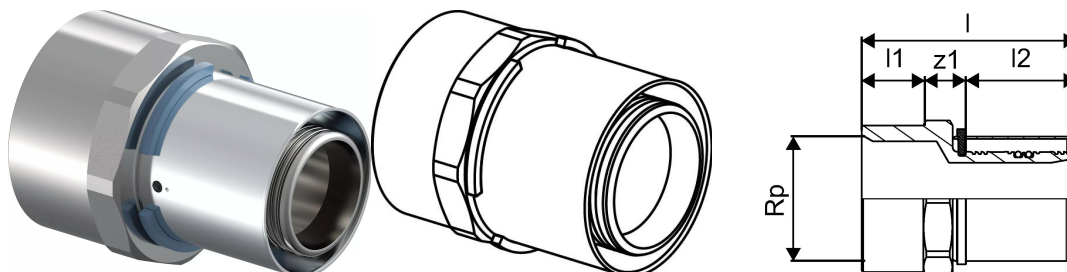

About Uponor S-Press adapter female thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press adapter female thread 40-Rp1 1/2"FT

1046904

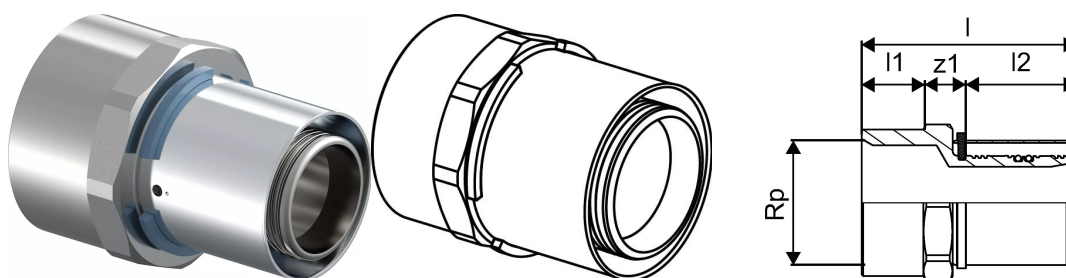

Technical data

Item no VVS	045482042
Item no NRF	5071552
Item (unit of measurement)	pce
Female_thread_Rp	1 1/2 inch
Length (l)	77 mm
Length (l1)	21 mm
Length (l2)	38 mm
Packaging Quantity PL1	5
Packaging Quantity PL4	960

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb