
Product data sheet




GF Uponor S-Press adapter male thread MT 50-R1 1/2"

1046905

- Made of tin-plated brass
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

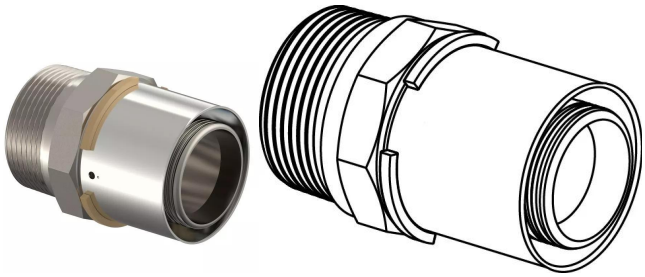



About GF Uponor S-Press adapter male thread MT

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press adapter male thread MT 50-R1 1/2"

1046905

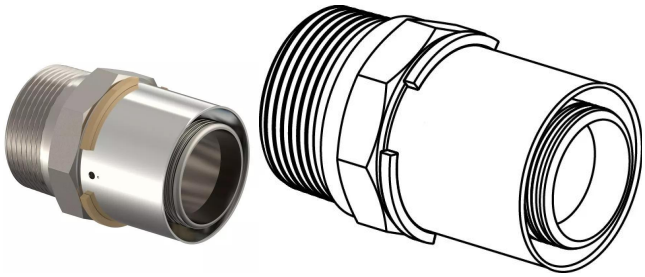



Product code

Item no EAN	4021598114029
Item no GF	35001046905
Item no GTIN	04021598114029
Item no LVI	1720930
Item no NRF	1627544
Item no VVS	045481445

Dimensions

Item Unit Height	55
Item Unit Length	72
Item Unit Weight	0,348
Item Unit Width	55
Item_UOM	pce

Measurements

LENGTH_L	72
Length (l1)	20
Length (l2)	37,5
Male_thread_R	1 1/2
Z Measurement d	50
z1	14,5

Packaging

Packaging GTIN PL1	06414905401499
Packaging GTIN PL4	06414905401505
Packaging Height PL1	90
Packaging Height PL4	560
Packaging Length PL1	70

Packaging Length PL4	1120
Packaging Quantity PL1	3
Packaging Quantity PL4	1152
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0011025
Packaging Volume PL4	0,4691456
Packaging Weight PL1	1,513
Packaging Weight PL4	580,992
Packaging Width PL1	175
Packaging Width PL4	748

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+