


## Uponor S-Press elbow 40-40

**1046908**

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

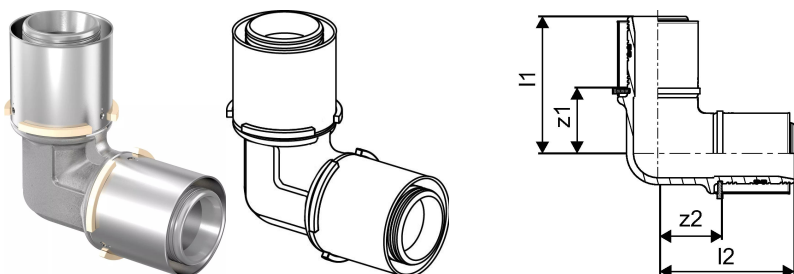

### About Uponor S-Press elbow

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:

Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press elbow 40-40

1046908

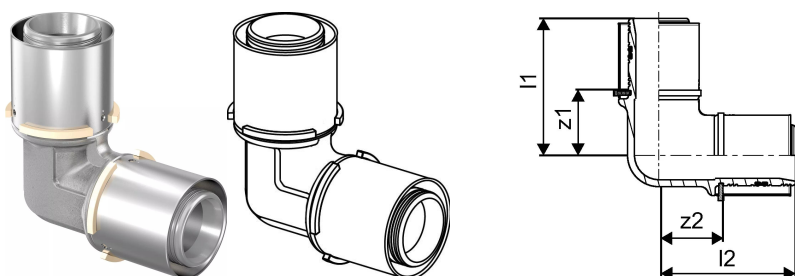

### Technical data

Item no VVS	045470140
Item (unit of measurement)	pce
Length (l1)	72 mm
Length (l2)	72 mm
z2	34 mm
Packaging Quantity PL1	5
Packaging Quantity PL4	600

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)