



## Uponor S-Press elbow female thread 40-Rp1 1/2"FT

### 1046910

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

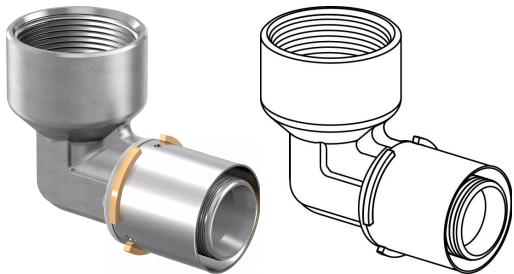

## About Uponor S-Press elbow female thread

### Specification

- with fixed press sleeve
- stop ring
- test safety

### Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification



-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC

-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

## Uponor S-Press elbow female thread 40-Rp1 1/2"FT 1046910

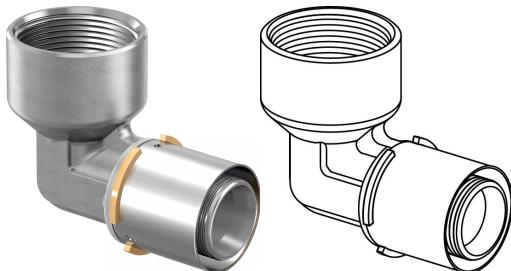

### Measurements

Female thread Rp	1 1/2
Length (l1)	59
Length (l2)	74,5
z1	37,6
z2	36,8

### Product code

Item no EAN	4021598114074
Item no GF	35001046910
Item no GTIN	04021598114074
Item no VVS	045472042

### Dimensions

Item Unit Height	53
Item Unit Length	80
Item Unit Weight	0,524
Item Unit Width	80
Item_UOM	pce

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Packaging

Packaging GTIN PL1	06414905460557
Packaging GTIN PL4	06414905555277
Packaging Height PL1	105
Packaging Height PL4	645
Packaging Length PL1	176
Packaging Length PL4	800
Packaging Quantity PL1	5
Packaging Quantity PL4	500

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	2,7
Packaging Weight PL4	290
Packaging Width PL1	202
Packaging Width PL4	1200

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)