
Product data sheet




GF Uponor S-Press elbow 50-50

1046911

- Made of tin-plated brass
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

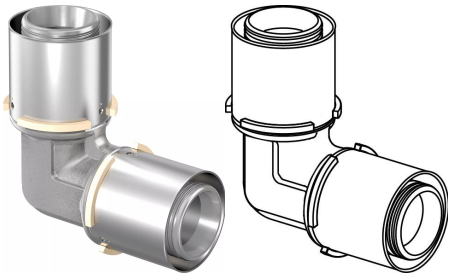



About GF Uponor S-Press elbow

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press elbow 50-50

1046911

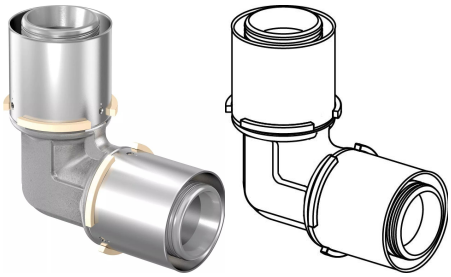



Product code

Item no EAN	4021598114081
Item no GF	35001046911
Item no GTIN	04021598114081
Item no LVI	1720934
Item no NRF	1627547
Item no VVS	045470150

Dimensions

Item Unit Height	58
Item Unit Length	106
Item Unit Weight	0,711
Item Unit Width	105
Item_UOM	pce

Measurements

Length (l1)	78,5
Length (l2)	78,5
z1	40,6
Z2	40,6

Packaging

Packaging GTIN PL1	06414905401574
Packaging GTIN PL4	06414905401581
Packaging Height PL1	110
Packaging Height PL4	800
Packaging Length PL1	205
Packaging Length PL4	1200
Packaging Quantity PL1	3

Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00399135
Packaging Volume PL4	0,768
Packaging Weight PL1	2,22
Packaging Weight PL4	294
Packaging Width PL1	177
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+