


## Uponor S-Press elbow 45deg 40-40

### 1046913

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

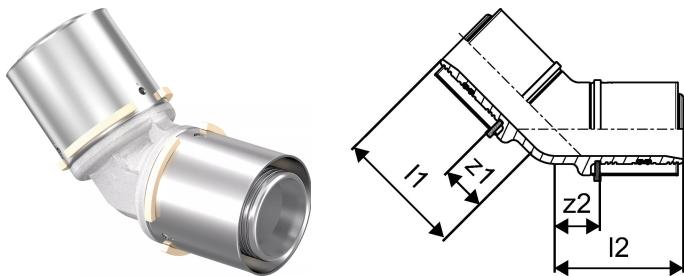

## About Uponor S-Press elbow 45deg

### Specification

- with fixed press sleeve
- stop ring
- test safety

### Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass


if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC
- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC
- KIWA – UK water Regulation 4
- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

## Uponor S-Press elbow 45deg 40-40 1046913



### Product code

Item no EAN	4021598114104
Item no GF	35001046913
Item no GTIN	04021598114104
Item no VVS	045473040

### Dimensions

Item Unit Height	115
Item Unit Length	50
Item Unit Weight	0,41
Item Unit Width	50
Item_UOM	pce

### Measurements

Length (l1)	58,5
Length (l2)	58,5
z1	20,6
z2	20,6

### Packaging

Packaging GTIN PL1	06414905401598
Packaging GTIN PL4	06414905555291
Packaging Height PL1	105
Packaging Height PL4	645
Packaging Length PL1	176
Packaging Length PL4	800
Packaging Quantity PL1	5
Packaging Quantity PL4	500
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296

Packaging Volume PL4	0,6192
Packaging Weight PL1	2,14
Packaging Weight PL4	234
Packaging Width PL1	202
Packaging Width PL4	1200

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)