


Uponor S-Press tee female thread 40-Rp3/4"FT-40

1046923

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

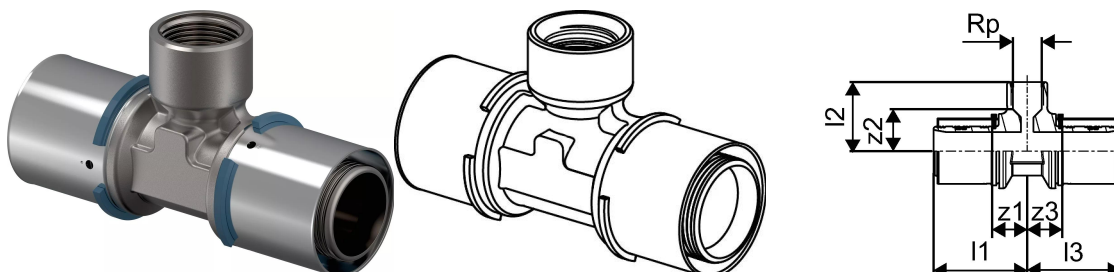

About Uponor S-Press tee female thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

Uponor S-Press tee female thread 40-Rp3/4"FT-40

1046923

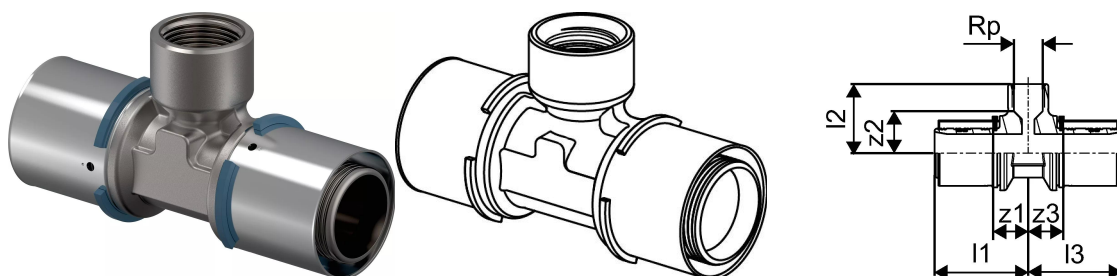

Measurements

Female thread Rp	0,75
Length (l1)	64
Length (l2)	47
Length (l3)	64
z1	26,1
z2	30,7
z3	26,1

Product code

Item no EAN	4021598114203
Item no GF	35001046923
Item no GTIN	04021598114203
Item no VVS	045478414

Dimensions

Item Unit Height	60
Item Unit Length	125
Item Unit Weight	0,53
Item Unit Width	40
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905401635
Packaging GTIN PL4	06414905401642
Packaging Height PL1	110
Packaging Height PL4	794
Packaging Length PL1	205
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	400

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00394625
Packaging Volume PL4	0,76224
Packaging Weight PL1	2,75
Packaging Weight PL4	239,12
Packaging Width PL1	175
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb