
Product data sheet



GF Uponor S-Press tee reduced 50-25-50

1046925

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

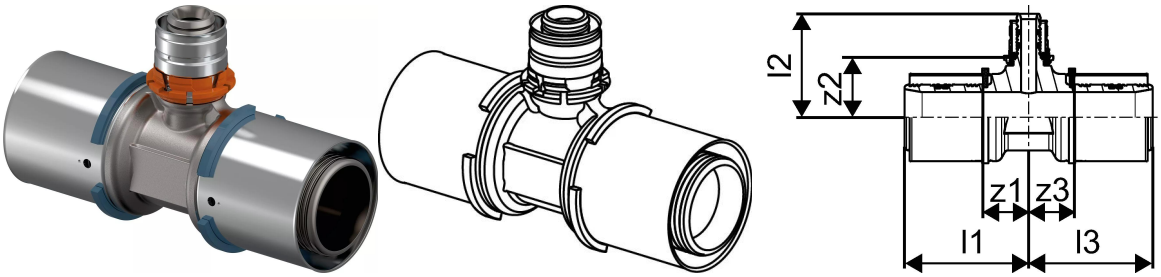

About GF Uponor S-Press tee reduced

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA


To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press tee reduced 50-25-50

1046925

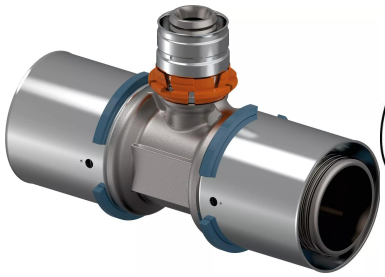

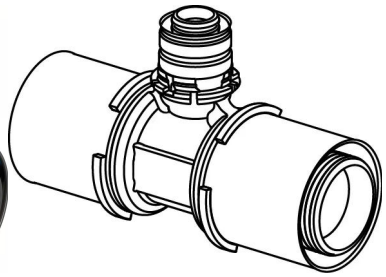

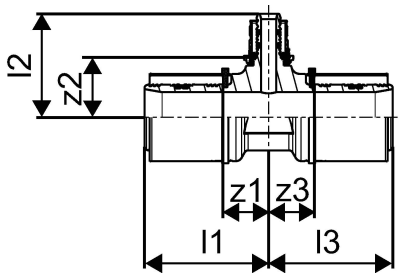

Status

Item Available Till date	2026-12-31T00:00:00.000+0100

Product code

Item no EAN	4021598114227
Item no GF	35001046925
Item no GTIN	04021598114227
Item no VVS	045476437
Item Replacement 1	1137425

Dimensions

Item Unit Height	57
Item Unit Length	119
Item Unit Weight	0,643
Item Unit Width	97
Item_UOM	pce

Measurements

Length (l1)	61
Length (l2)	65
Length (l3)	61
z1	23,1
Z2	34,7
Z3	23,1

Packaging

Packaging GTIN PL1	06414905460663
Packaging GTIN PL4	06414905493470
Packaging Height PL1	110
Packaging Height PL4	584

Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0039688
Packaging Volume PL4	0,56064
Packaging Weight PL1	2,011
Packaging Weight PL4	180,863
Packaging Width PL1	205
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+