
Product data sheet



GF Uponor S-Press tee reduced 50-40-50

1046927

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

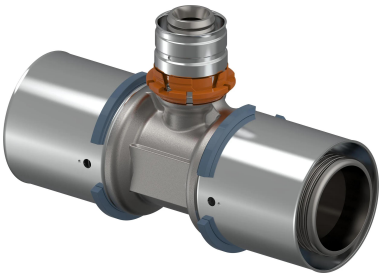

About GF Uponor S-Press tee reduced

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press tee reduced 50-40-50

1046927

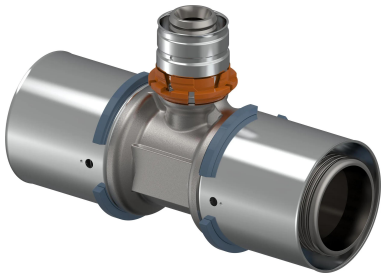

Product code

Item no EAN	4021598114241
Item no GF	35001046927
Item no GTIN	04021598114241
Item no LVI	1720953
Item no NRF	1627552
Item no VVS	045476445

Dimensions

Item Unit Height	112
Item Unit Length	145
Item Unit Weight	0,86
Item Unit Width	52
Item_UOM	pce

Measurements

Length (l1)	71,5
Length (l2)	78,5
Length (l3)	71,5
z1	33,6
Z2	40,6
Z3	33,6

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905460687
Packaging GTIN PL4	06414905555369
Packaging Height PL1	105

Packaging Height PL4	645
Packaging Length PL1	176
Packaging Length PL4	800
Packaging Quantity PL1	3
Packaging Quantity PL4	300
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	2,623
Packaging Weight PL4	282,3
Packaging Width PL1	202
Packaging Width PL4	1200

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+