


Uponor S-Press reducer 50-40

1046934

- Made of tin-plated brass
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

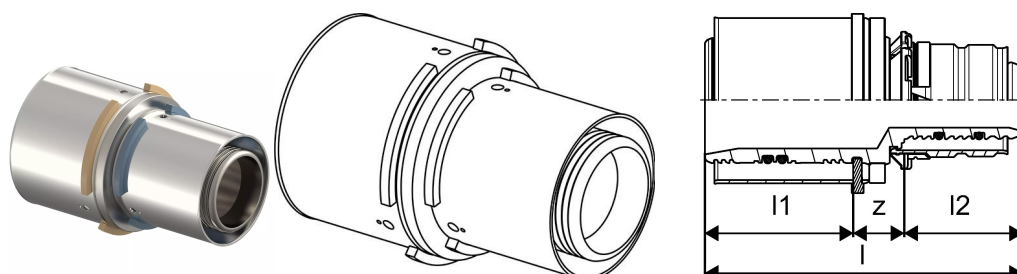

About Uponor S-Press reducer

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press reducer 50-40

1046934

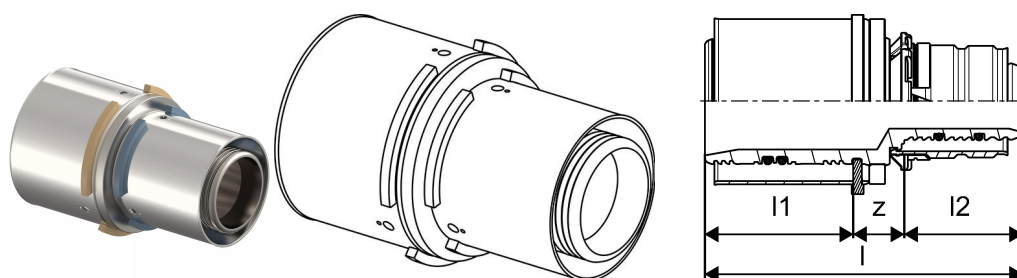

Product code

Item no EAN	4021598114319
Item no GF	35001046934
Item no GTIN	04021598114319
Item no VVS	045480445

Dimensions

Item Unit Height	54
Item Unit Length	92
Item Unit Weight	0,33
Item Unit Width	54
Item_UOM	pce

Measurements

LENGTH_L	89,2
Length (l1)	37,8
Length (l2)	37,8
z1	13,6

Packaging

Packaging GTIN PL1	06414905401697
Packaging GTIN PL4	06414905401703
Packaging Height PL1	89
Packaging Height PL4	411
Packaging Length PL1	135
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001045305

Packaging Volume PL4	0,39456
Packaging Weight PL1	1,07
Packaging Weight PL4	216,981
Packaging Width PL1	87
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb