


## Uponor S-Press adapter swivel nut 40-G1 1/2"SN

### 1046937

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.

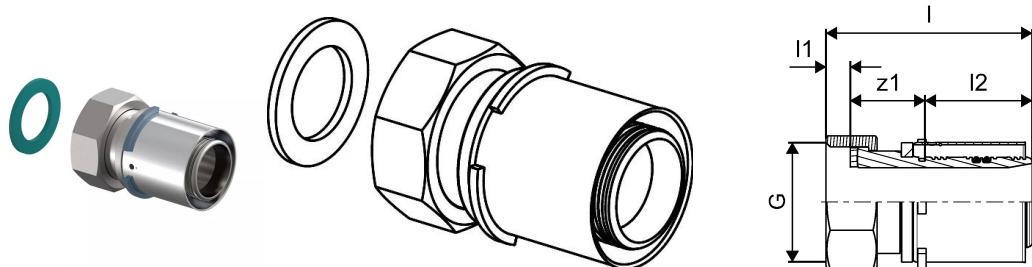

## About Uponor S-Press adapter swivel nut

### Specification

- with fixed press sleeve
- stop ring
- test safety

### Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC



- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

## Uponor S-Press adapter swivel nut 40-G1 1/2"SN

1046937

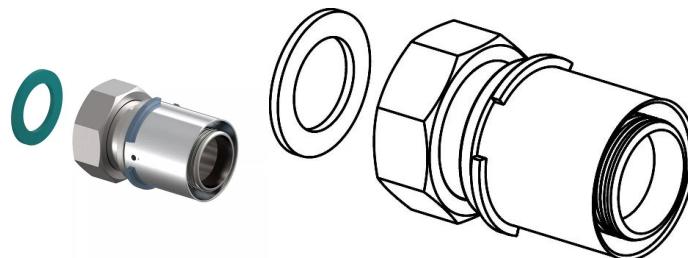

### Measurements

Cylindric_thread_G	1,5
LENGTH_L	77,2
Length (I1)	9,5
Length (I2)	37,9
z1	29,8

### Product code

Item no EAN	4021598114333
Item no GF	35001046937
Item no GTIN	04021598114333
Item no VVS	045483042

### Dimensions

Item Unit Height	55
Item Unit Length	74
Item Unit Weight	0,358
Item Unit Width	55
Item_UOM	pce

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Packaging

Packaging GTIN PL1	06414905401734
Packaging GTIN PL4	06414905401741
Packaging Height PL1	89
Packaging Height PL4	570
Packaging Length PL1	176
Packaging Length PL4	1120
Packaging Quantity PL1	5
Packaging Quantity PL4	960

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,4775232
Packaging Weight PL1	1,829
Packaging Weight PL4	361,19
Packaging Width PL1	135
Packaging Width PL4	748

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)