
Product data sheet



GF Uponor S-Press adapter swivel nut 50-G2"SN

1046939

- Made of tin-plated brass
- Demountable and resealable screw fitting for connection to valves and equipment
- Supplied with sealing gasket
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code
- Thread acc. to BS EN ISO 228-1.

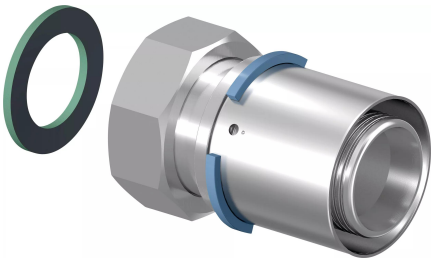

About GF Uponor S-Press adapter swivel nut

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press adapter swivel nut 50-G2"SN

1046939

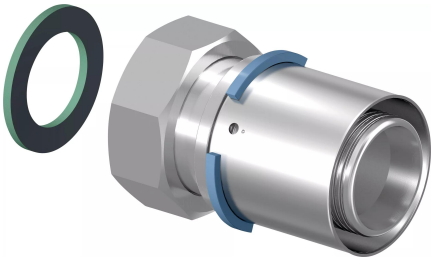

Measurements

Cylindric_thread_G	2
LENGTH_L	81,7
Length (l1)	12
Length (l2)	37,9
z1	31,8

Product code

Item no EAN	4021598114357
Item no GF	35001046939
Item no GTIN	04021598114357
Item no LVI	1720957
Item no NRF	1627559
Item no VVS	045483054

Dimensions

Item Unit Height	66
Item Unit Length	80
Item Unit Weight	0,497
Item Unit Width	66
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905401758
Packaging GTIN PL4	06414905401765
Packaging Height PL1	90
Packaging Height PL4	570
Packaging Length PL1	175
Packaging Length PL4	1120

Packaging Quantity PL1	3
Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00212625
Packaging Volume PL4	0,4775232
Packaging Weight PL1	1,581
Packaging Weight PL4	303,533
Packaging Width PL1	135
Packaging Width PL4	748

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+