


Uponor S-Press adapter swivel nut 50-G2"SN

1046939

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.

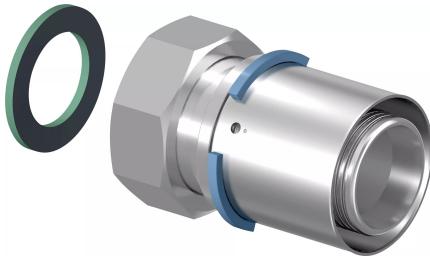

About Uponor S-Press adapter swivel nut

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

Uponor S-Press adapter swivel nut 50-G2"SN

1046939

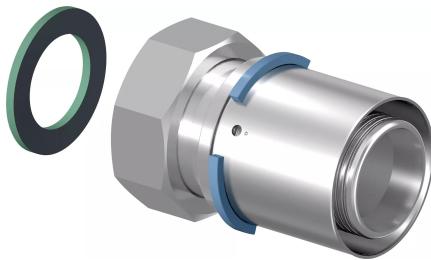

Measurements

Cylindric_thread_G	2
LENGTH_L	81,7
Length (l1)	12
Length (l2)	37,9
z1	31,8

Product code

Item no EAN	4021598114357
Item no GF	35001046939
Item no GTIN	04021598114357
Item no VVS	045483054

Dimensions

Item Unit Height	66
Item Unit Length	80
Item Unit Weight	0,497
Item Unit Width	66
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905401758
Packaging GTIN PL4	06414905401765
Packaging Height PL1	90
Packaging Height PL4	570
Packaging Length PL1	175
Packaging Length PL4	1120
Packaging Quantity PL1	3
Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,00212625
Packaging Volume PL4	0,4775232
Packaging Weight PL1	1,581
Packaging Weight PL4	303,533
Packaging Width PL1	135
Packaging Width PL4	748

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb