


Uponor RS adapter S-Press 50-RS2

1046941

- Made of tin-plated brass
- Inspection windows on press sleeve
- Select the adapter based on the pipe size and then select the corresponding RS2 or RS3 base part.

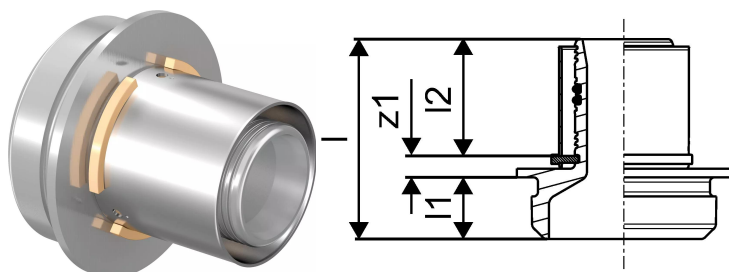

About Uponor RS adapter S-Press

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor RS adapter S-Press 50-RS2

1046941



Product code

Item no EAN	4021598114371
Item no GF	35001046941
Item no GTIN	04021598114371
Item no NRF	5071232
Item no VVS	045450050

Dimensions

Item Unit Height	69
Item Unit Length	67
Item Unit Weight	0,409
Item Unit Width	69
Item_UOM	pce

Measurements

LENGTH_L	64,8
Length (l1)	20
Length (l2)	37,9
z1	6,9

Packaging

Packaging GTIN PL1	06414905401796
Packaging GTIN PL4	06414905401802
Packaging Height PL1	84
Packaging Height PL4	800
Packaging Length PL1	120
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,001008
Packaging Volume PL4	0,768
Packaging Weight PL1	0,8
Packaging Weight PL4	223,283
Packaging Width PL1	100
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb