


Uponor Combi Pipe white opaque PN6 S 16x1,8 3m

1058803

- Operating pressure 6 bar
- bars
- white with opaque layer

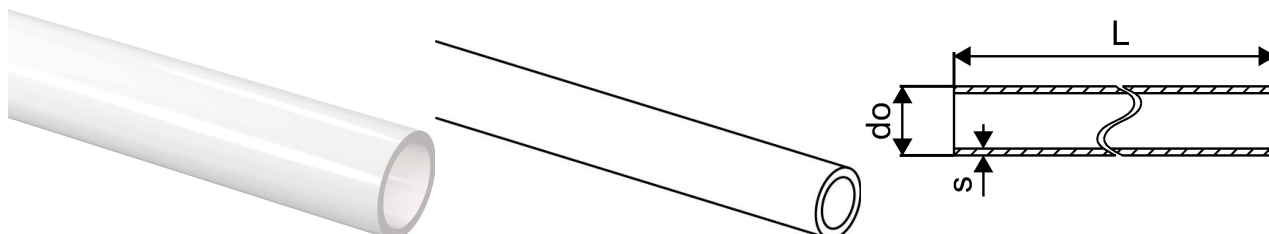

About Uponor Combi Pipe white opaque PN6 S

Specification


- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Combi Pipe white opaque PN6 S 16x1,8 3m

1058803

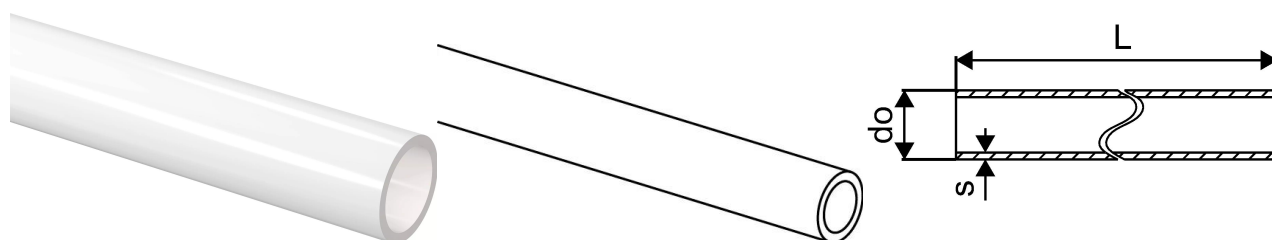

Product code

Item no EAN 6414905514304

Item no GTIN 06414905514304

Dimensions

Item Unit Height 16

Item Unit Length 1000

Item Unit Weight 0,14

Item Unit Width 16

Item_UOM m

Measurements

Outer Diameter_do 16

Wall thickness_s 1,8

Packaging

Packaging GTIN PL2 06414905422302

Packaging GTIN PL4 06414905422319

Packaging Height PL2 110

Packaging Height PL4 744

Packaging Length PL2 2100

Packaging Length PL4 1200

Packaging Quantity PL2 75

Packaging Quantity PL4 2625

Packaging Type PL2 Bag

Packaging Type PL4 Wooden_Cage

Packaging Volume PL2 0,02541

Packaging Volume PL4 0,71424

Packaging Weight PL2 10,5

Packaging Weight PL4 392,5

Packaging Width PL2 110

Packaging Width PL4

800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb