Product data sheet



GF Uponor Combi Pipe white opaque PN6 S 20x1,9 3m

1058804

- Operating pressure 6 bar
- bars
- white with opaque layer

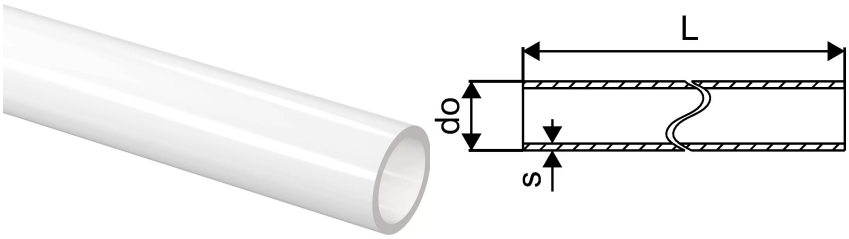

About GF Uponor Combi Pipe white opaque PN6 S

Specification

- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Underfloor heating and low temperature radiators

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

GF Uponor Combi Pipe white opaque PN6 S 20x1,9 3m

1058804

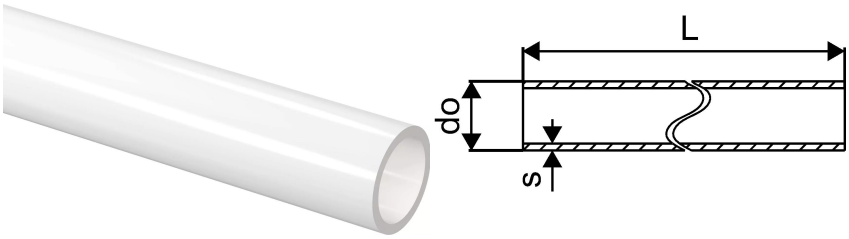

Product code

Item no EAN	6414905514311
Item no GTIN	06414905514311

Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,19
Item Unit Width	20
Item_UOM	m

Measurements

Outer Diameter_do	20
Wall thickness_s	1,9

Packaging

Packaging GTIN PL1	06414900321525
Packaging GTIN PL4	06414905422296
Packaging Height PL1	30
Packaging Height PL4	744
Packaging Length PL1	3000
Packaging Length PL4	1200
Packaging Quantity PL1	48
Packaging Quantity PL4	1680
Packaging Type PL1	Plastic_Bag
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,00495
Packaging Volume PL4	0,71424
Packaging Weight PL1	9,17

Packaging Weight PL4	345,95
Packaging Width PL1	55
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+