


Uponor Combi Pipe white opaque PN6 S 25x2,3 3m

1058805

- Operating pressure 6 bar
- bars
- white with opaque layer

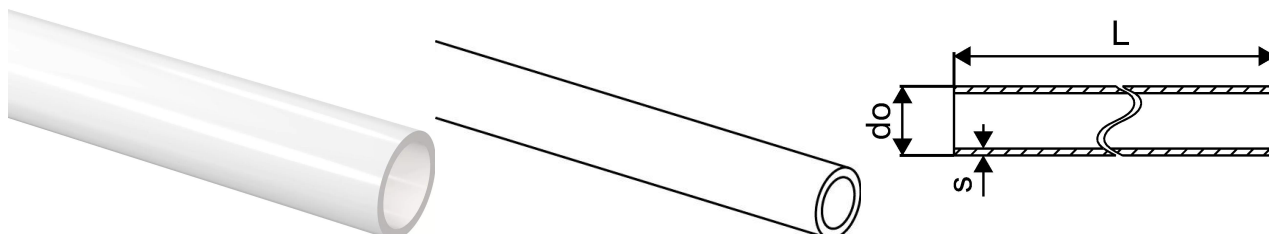

About Uponor Combi Pipe white opaque PN6 S

Specification


- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Combi Pipe white opaque PN6 S 25x2,3 3m

1058805

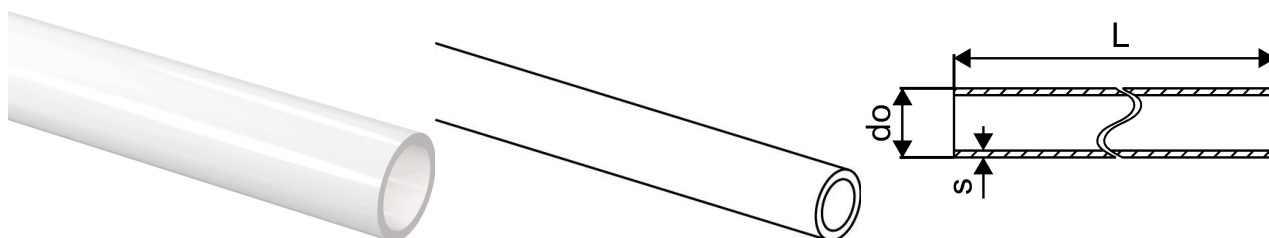

Product code

Item no EAN 6414905514328

Item no GTIN 06414905514328

Dimensions

Item Unit Height 25

Item Unit Length 1000

Item Unit Weight 0,27

Item Unit Width 25

Item_UOM m

Measurements

Outer Diameter_do 25

Wall thickness_s 2,3

Packaging

Packaging GTIN PL1 06414900321532

Packaging GTIN PL4 06414905422272

Packaging Height PL1 30

Packaging Height PL4 744

Packaging Length PL1 3000

Packaging Length PL4 1200

Packaging Quantity PL1 30

Packaging Quantity PL4 1050

Packaging Type PL1 Plastic_Bag

Packaging Type PL4 Wooden_Cage

Packaging Volume PL1 0,00495

Packaging Volume PL4 0,71424

Packaging Weight PL1 8,1

Packaging Weight PL4 308,5

Packaging Width PL1 55

Packaging Width PL4

800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb