


## Uponor Combi Pipe white opaque PN6 25x2,3 50m

1059175

- Operating pressure 6 bar
- Coils
- White with opaque layer

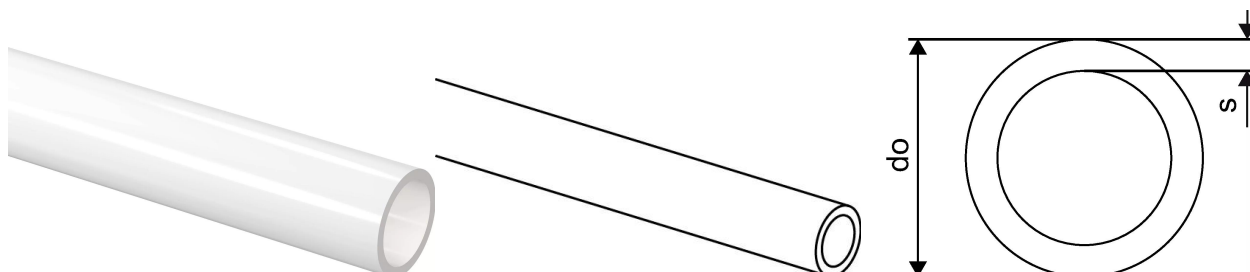

### About Uponor Combi Pipe white opaque PN6

#### Specification


- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Combi Pipe white opaque PN6 25x2,3 50m

1059175

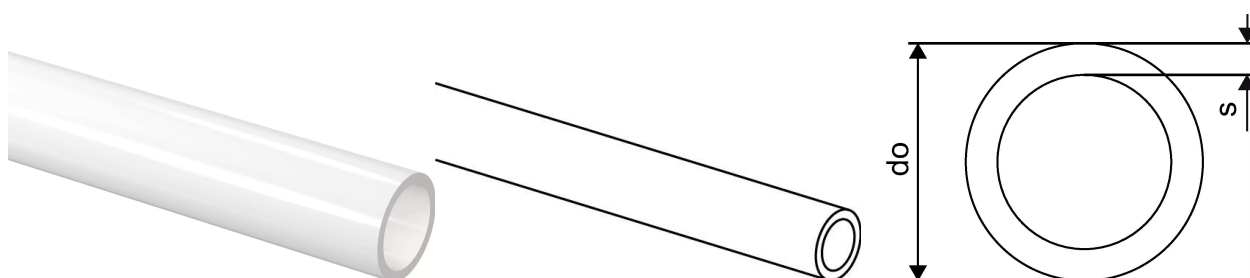

### Product code

Item no EAN	6414905514359
Item no GF	35001059175
Item no GTIN	06414905514359

### Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,27
Item Unit Width	25
Item_UOM	m

### Measurements

Outer Diameter_do	25
Wall thickness_s	2,3

### Packaging

Packaging GTIN PL1	06414905410347
Packaging GTIN PL4	06414900654678
Packaging Height PL1	804
Packaging Height PL4	948
Packaging Length PL1	788
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	450
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,078560448
Packaging Volume PL4	0,91008
Packaging Weight PL1	14,8
Packaging Weight PL4	158,2

Packaging Width PL1	124
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)