


Uponor Combi Pipe opaque in conduit red 16x1,8 25/20 50m

1059179

- Fire class E according to BS EN 13501-1
- Conduits manufactured from high density polyethylene

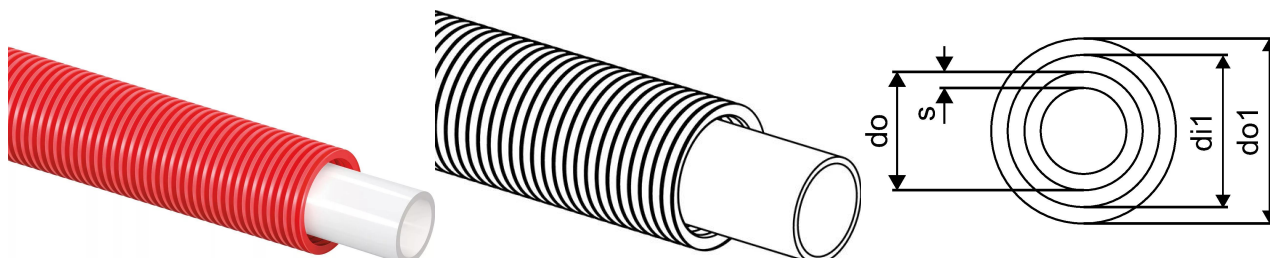

About Uponor Combi Pipe opaque in conduit red

Specification


- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Combi Pipe opaque in conduit red 16x1,8 25/20 50m

1059179

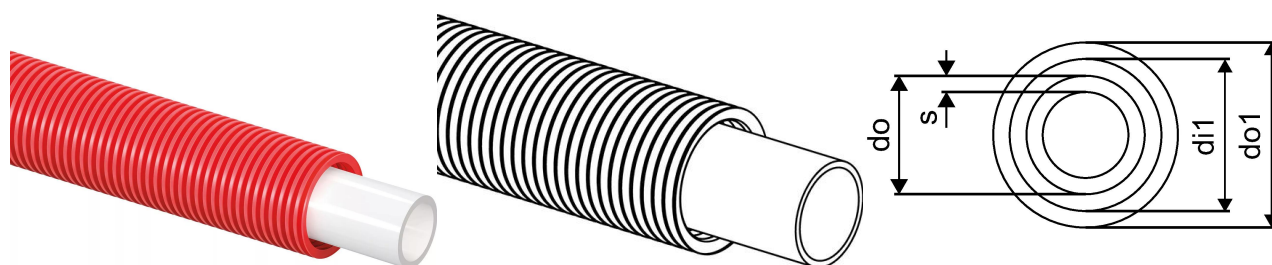

Measurements

Inner_diameter_di1	20
Outer Diameter_do	16
Outer Diameter_do1	25
Wall thickness_s	1,8

Product code

Item no EAN	6414905514373
Item no GTIN	06414905514373

Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,18
Item Unit Width	25
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905410385
Packaging GTIN PL4	06414905410392
Packaging Height PL1	788
Packaging Height PL4	948
Packaging Length PL1	788
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	550
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,067061952
Packaging Volume PL4	0,91008
Packaging Weight PL1	9,1

Packaging Weight PL4	124
Packaging Width PL1	108
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb