


Uponor Combi Pipe white opaque PN6 16x1,8 100m

1059182

- Operating pressure 6 bar
- Coils
- White with opaque layer

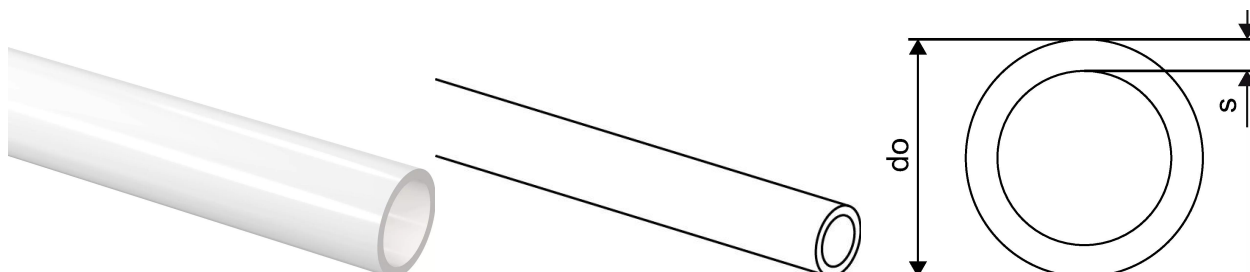

About Uponor Combi Pipe white opaque PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Combi Pipe white opaque PN6 16x1,8 100m

1059182

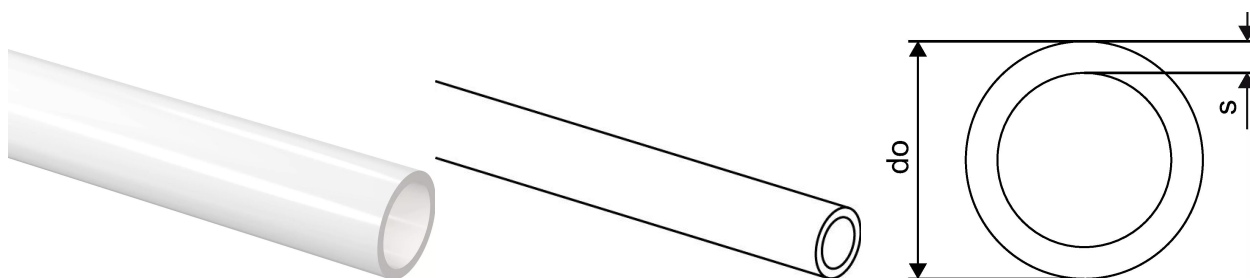

Technical data

Item no EAN	6414905514403
Item no GTIN	06414905514403
Item (unit of measurement)	m
Packaging Quantity 1	100
Packaging Quantity 4	1100
Packaging GTIN PL1	06414905410422
Packaging GTIN PL4	06414905410439
Item Unit Height	16 mm
Item Unit Weight	0,14 kg
Item Unit Width	16 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb