


Uponor Combi Pipe white opaque PN6 16x1,8 200m

1059183

- Operating pressure 6 bar
- Coils
- White with opaque layer

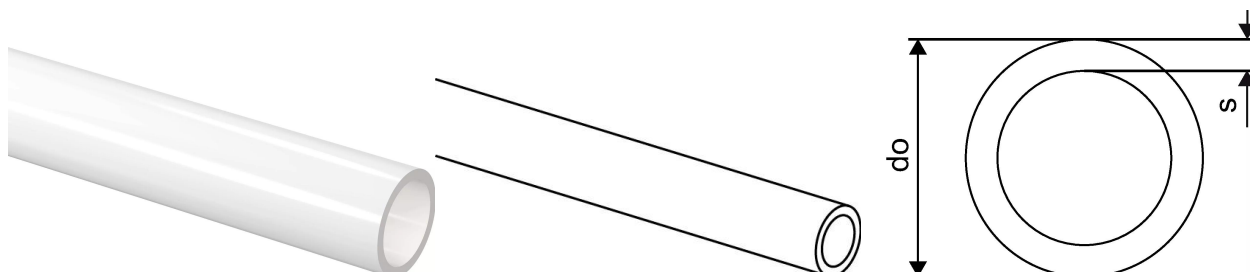

About Uponor Combi Pipe white opaque PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Combi Pipe white opaque PN6 16x1,8 200m

1059183

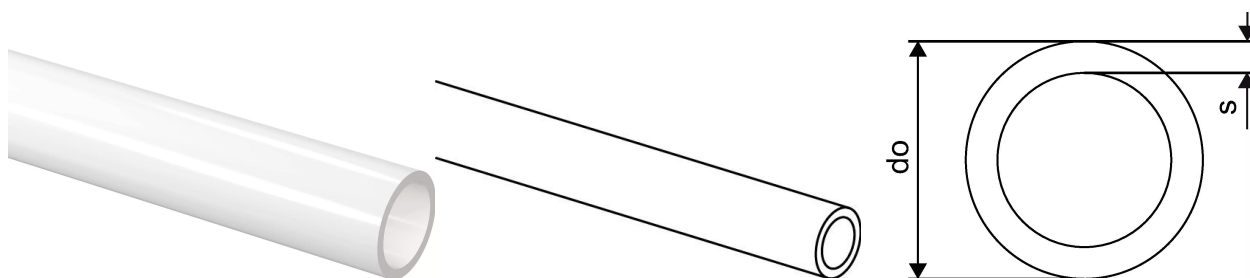

Technical data

| | |
|----------------------------|------|
| Item (unit of measurement) | m |
| Packaging Quantity PL1 | 200 |
| Packaging Quantity PL4 | 1200 |

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb