


## Uponor RS adapter S-Press 16-RS2

### 1059397

- Made of tin-plated brass
- Fits to all RS2 base parts.

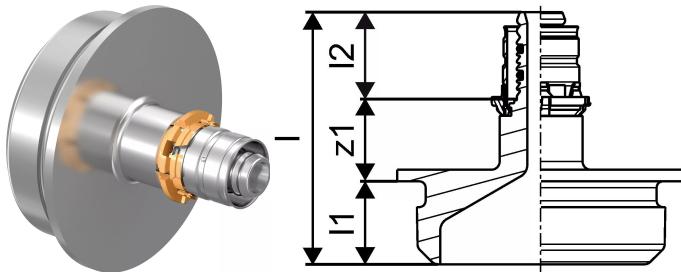

## About Uponor RS adapter S-Press

### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

### Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

## Uponor RS adapter S-Press 16-RS2

1059397

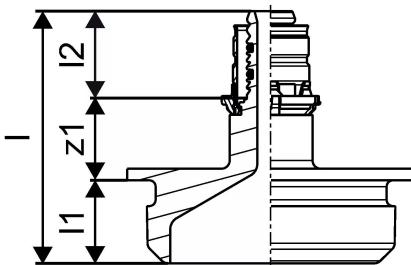

### Product code

Item no EAN	4021598121690
Item no GF	35001059397
Item no GTIN	04021598121690
Item no RSK	1897882
Item no VVS	045450016

### Dimensions

Item Unit Height	68
Item Unit Length	58
Item Unit Weight	0,353
Item Unit Width	68
Item_UOM	pce

### Measurements

LENGTH_L	60,8
Length (I1)	20
Length (I2)	21
z1	19,8

### Packaging

Packaging GTIN PL1	06414905463534
Packaging GTIN PL4	06414905495702
Packaging Height PL1	78
Packaging Height PL4	800
Packaging Length PL1	118
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,000901992
Packaging Volume PL4	0,768
Packaging Weight PL1	0,414
Packaging Weight PL4	194,44
Packaging Width PL1	98
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)