
Product data sheet



GF Uponor RS adapter S-Press 16-RS2

1059397

- Made of tin-plated brass
- Inspection windows on press sleeve
- Contoured aluminium press sleeve with colour coded breakaway press indicator
- Fits into all RS2 base parts.

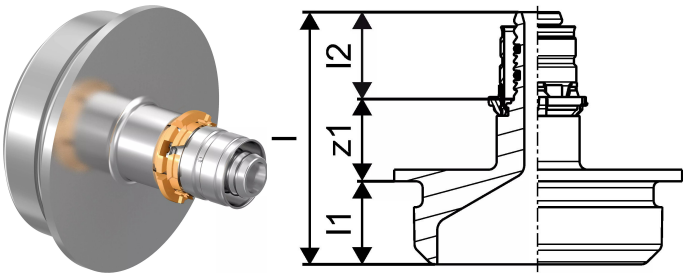

About GF Uponor RS adapter S-Press

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor RS adapter S-Press 16-RS2

1059397

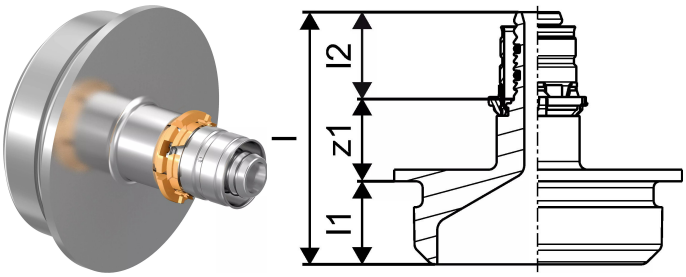

Product code

Item no EAN	4021598121690
Item no GF	35001059397
Item no GTIN	04021598121690
Item no RSK	1897882
Item no VVS	045450016

Dimensions

Item Unit Height	68
Item Unit Length	58
Item Unit Weight	0,353
Item Unit Width	68
Item_UOM	pce

Measurements

LENGTH_L	60,8
Length (l1)	20
Length (l2)	21
z1	19,8

Packaging

Packaging GTIN PL1	06414905463534
Packaging GTIN PL4	06414905495702
Packaging Height PL1	78
Packaging Height PL4	800
Packaging Length PL1	118
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000901992
Packaging Volume PL4	0,768
Packaging Weight PL1	0,414
Packaging Weight PL4	194,44
Packaging Width PL1	98
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+