


Uponor RS flange adapter PN6 RS2-DN65 (PN6)

1059398

- Made of tin-plated brass
- Connects to RS2 or RS3 base parts depending on the flange size or base part size
- Flange PN6/PN16 acc. to BS EN 1092-3
- Bolt circle with 4/8 holes.

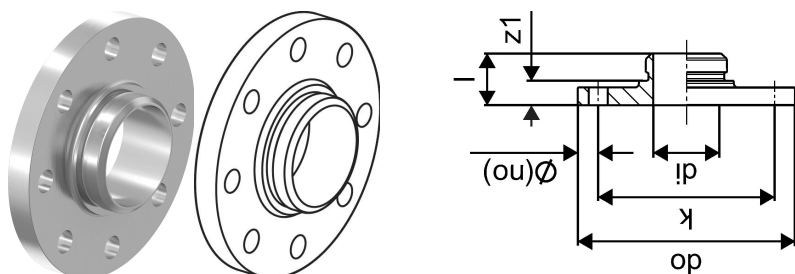

About Uponor RS flange adapter PN6

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor RS flange adapter PN6 RS2-DN65 (PN6)

1059398



Measurements

Inner_diameter_di	48,7
LENGTH_L	38
Outer Diameter_do	160
Z Measurement k	130
z1	18

Product code

Item no EAN	4021598121706
Item no GF	35001059398
Item no GTIN	04021598121706
Item no NRF	5071281
Item no RSK	1897883

Dimensions

Item Unit Height	40
Item Unit Length	160
Item Unit Weight	1,2
Item Unit Width	160
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905481385
Packaging GTIN PL4	06414905481392
Packaging Height PL1	60
Packaging Height PL4	700
Packaging Length PL1	215
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	144
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,002838
Packaging Volume PL4	0,672
Packaging Weight PL1	1,4
Packaging Weight PL4	197,8
Packaging Width PL1	220
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb