
Product data sheet



GF Uponor RS adapter female thread Rp1/2"FT-RS3

1059404

- Made of tin plated brass
- Connects RS base parts RS2 or RS3 depending on connection thread size.

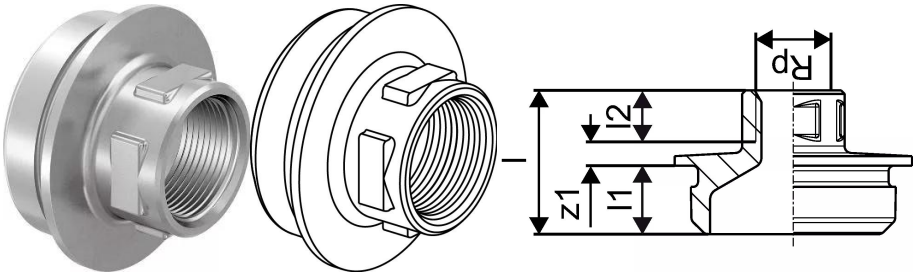

About GF Uponor RS adapter female thread

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor RS adapter female thread Rp1/2"FT-RS3

1059404

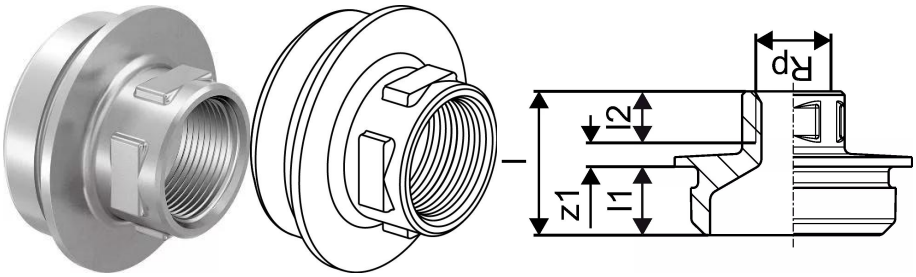

Measurements

Female thread Rp	0,5
LENGTH_L	43
Length (l1)	20
Length (l2)	15
z1	8

Product code

Item no EAN	4021598121768
Item no GF	35001059404
Item no GTIN	04021598121768
Item no RSK	1897889
Item no VVS	045452164

Dimensions

Item Unit Height	100
Item Unit Length	55
Item Unit Weight	0,662
Item Unit Width	100
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905463602
Packaging GTIN PL4	06414905495771
Packaging Height PL1	71
Packaging Height PL4	700
Packaging Length PL1	150
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	336
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00137385
Packaging Volume PL4	0,672
Packaging Weight PL1	0,734
Packaging Weight PL4	247,432
Packaging Width PL1	129
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+