


Uponor Uni Pipe PLUS white S 16x2,0 5m

1059572

- Bar
- High dimensional stability, low expansion rate
- A stiffer construction than a coiled pipe
- 100% Oxygen barrier

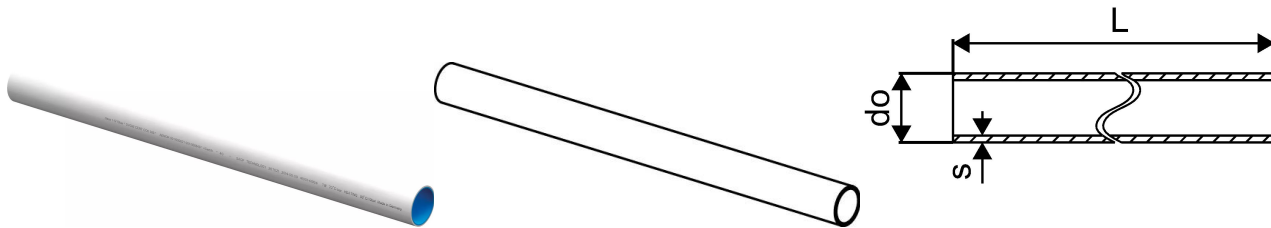

About Uponor Uni Pipe PLUS white S

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification



UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Uni Pipe PLUS white S 16x2,0 5m

1059572

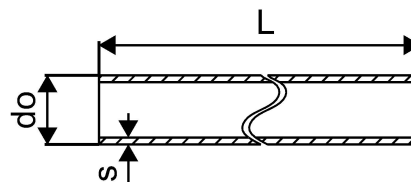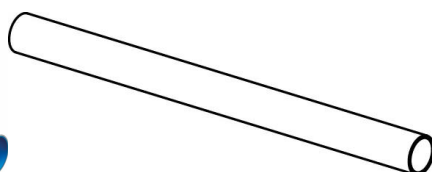

Product code

Item no EAN	4021598121201
Item no GF	35001059572
Item no GTIN	04021598121201
Item no LVI	1720133
Item no NOBB	48167212
Item no NRF	5072097
Item no RSK	2004932
Item no VVS	087480116

Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,124
Item Unit Width	16
Item_UOM	m

Measurements

Length	5
Outer Diameter_do	16
Wall thickness_s	2,0

Packaging

Packaging GTIN PL1	06414905411962
Packaging GTIN PL2	06414905411979
Packaging GTIN PL4	06414905411986
Packaging Height PL1	16
Packaging Height PL2	110
Packaging Height PL4	725
Packaging Length PL1	5000
Packaging Length PL2	5070

Packaging Length PL4	5080
Packaging Quantity PL1	5
Packaging Quantity PL2	125
Packaging Quantity PL4	6375
Packaging Type PL1	Piece
Packaging Type PL2	Cover_Pipe
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,00128
Packaging Volume PL2	0,061347
Packaging Volume PL4	4,23545
Packaging Weight PL1	0,62
Packaging Weight PL2	19,688
Packaging Weight PL4	1004,063
Packaging Width PL1	16
Packaging Width PL2	110
Packaging Width PL4	1150

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
 WD18 8GA, Watford
 UK

T +44 (0)1923 927000
 E enquiries.uk@uponor.com

www.uponor.com/en-gb