


Uponor Uni Pipe PLUS white 16x2,0 500m

1059578

- Coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

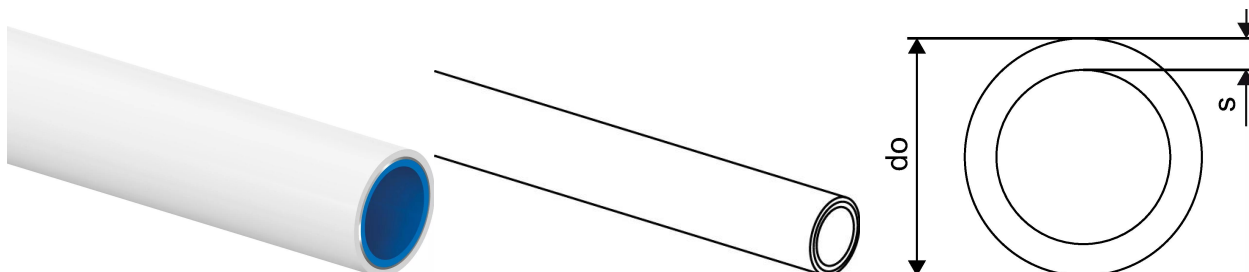

About Uponor Uni Pipe PLUS white

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Uni Pipe PLUS white 16x2,0 500m

1059578

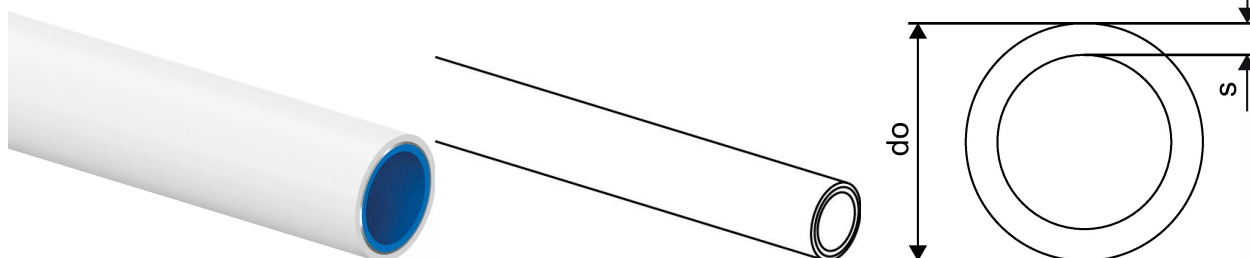

Product code

Item no EAN	4021598121263
Item no GF	35001059578
Item no GTIN	04021598121263
Item no LVI	1720139
Item no NOBB	48167242
Item no NRF	5072091

Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,117
Item Unit Width	16
Item_UOM	m

Measurements

Length	500
Outer Diameter_do	16
Wall thickness_s	2,0

Packaging

Packaging GTIN PL1	06414905412129
Packaging GTIN PL4	06414905412136
Packaging Height PL1	256
Packaging Height PL4	2000
Packaging Length PL1	1140
Packaging Length PL4	1150
Packaging Quantity PL1	500
Packaging Quantity PL4	3500
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,3326976
Packaging Volume PL4	2,645
Packaging Weight PL1	59,085
Packaging Weight PL4	423,5
Packaging Width PL1	1140
Packaging Width PL4	1150

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb