


Uponor Uni Pipe PLUS white 32x3,0 50m

1059583

- Coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

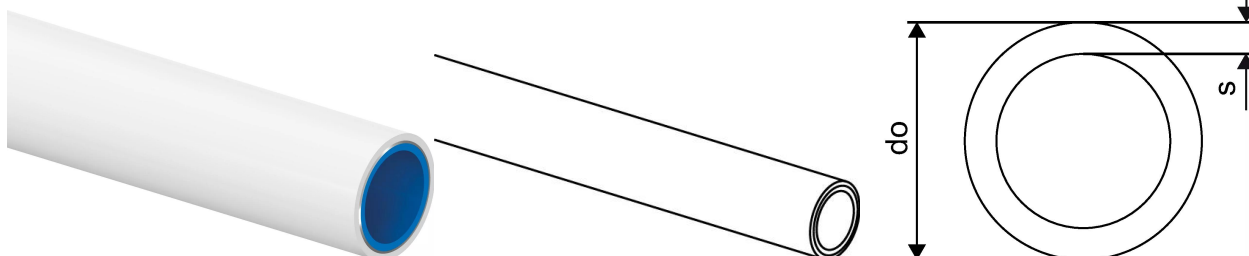

About Uponor Uni Pipe PLUS white

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Uni Pipe PLUS white 32x3,0 50m

1059583

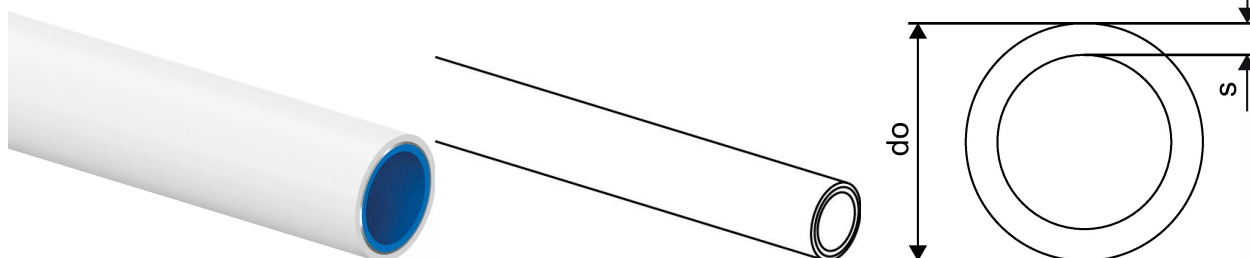

Product code

| | |
|--------------|----------------|
| Item no EAN | 4021598121317 |
| Item no GF | 35001059583 |
| Item no GTIN | 04021598121317 |
| Item no LVI | 1720144 |
| Item no NOBB | 48167295 |
| Item no NRF | 5072096 |
| Item no RSK | 2004928 |
| Item no VVS | 087480332 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 32 |
| Item Unit Length | 1000 |
| Item Unit Weight | 0,379 |
| Item Unit Width | 32 |
| Item_UOM | m |

Measurements

| | |
|-------------------|----|
| Length | 50 |
| Outer Diameter_do | 32 |
| Wall thickness_s | 3 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905412181 |
| Packaging GTIN PL4 | 06414905412198 |
| Packaging Height PL1 | 205 |
| Packaging Height PL4 | 2000 |
| Packaging Length PL1 | 1140 |
| Packaging Length PL4 | 1140 |
| Packaging Quantity PL1 | 50 |
| Packaging Quantity PL4 | 400 |

| | |
|----------------------|----------|
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,266418 |
| Packaging Volume PL4 | 2,5992 |
| Packaging Weight PL1 | 21,641 |
| Packaging Weight PL4 | 183,128 |
| Packaging Width PL1 | 1140 |
| Packaging Width PL4 | 1140 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb