



Uponor S-Press adapter swivel nut 40-G1 1/4"SN

1060094

- Made of tin-plated brass
- Demountable and resealable screw fitting for connection to valves and equipment
- Supplied with sealing gasket
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code
- Thread acc. to BS EN ISO 228-1.

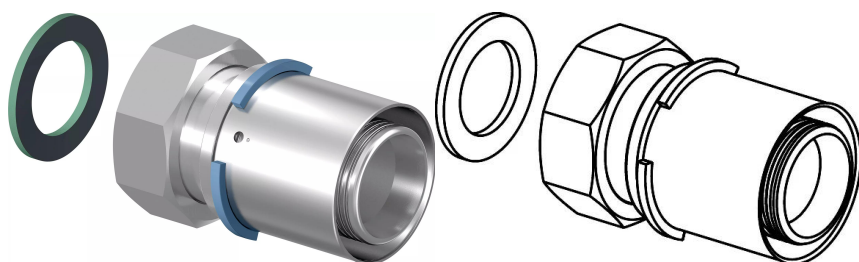

About Uponor S-Press adapter swivel nut

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press adapter swivel nut 40-G1 1/4"SN

1060094

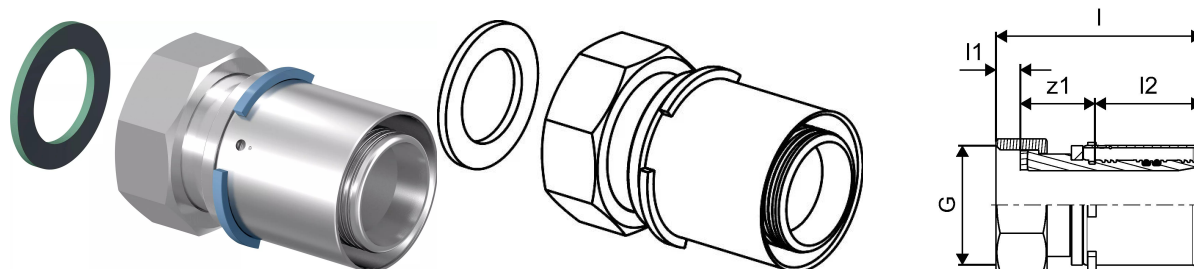

Measurements

Cylindric_thread_G	1 1/4
Female thread Rp	1,25
LENGTH_L	72,7
Length (l1)	8,5
Length (l2)	37,8
z1	26,4

Product code

Item no EAN	4021598122543
Item no GF	35001060094
Item no GTIN	04021598122543

Dimensions

Item Unit Height	65
Item Unit Length	47
Item Unit Weight	0,29
Item Unit Width	47
Item_UOM	pce

Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905412488
Packaging GTIN PL4	06414905412495
Packaging Height PL1	89
Packaging Height PL4	800
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	960

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,768
Packaging Weight PL1	1,487
Packaging Weight PL4	297,6
Packaging Width PL1	67
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb